Outage Rate Regions for the MISO Interference Channel: Definitions and Interpretations

Johannes Lindblom, Eleftherios Karipidis, and Erik G. Larsson

arXiv:1106.5615v1 [cs.IT] 28 Jun 2011

Abstract

We consider the slow-fading two-user multiple-input single-output (MISO) interference channel (IC), where the receivers treat the interference as additive Gaussian noise. We study the rate points that can be achieved, allowing a non-zero outage probability. The points which meet the outage probability specification constitute a so-called outage rate region. There exist several definitions of the outage rate regions for the IC, as for the broadcast and the multiple-access channels. We give four definitions for the outage region of the MISO IC. The definitions differ on whether the rates are declared in outage jointly or individually and whether there is instantaneous or statistical channel state information (CSI) at the transmitters. For the statistical CSI scenario, we discuss how to find the outage probabilities in closed form. We provide interpretations of the definitions and compare the corresponding regions via analytical and numerical results.

Index Terms

Beamforming, interference channel, MISO, outage probability, rate region

I. INTRODUCTION

In this paper, we consider the two-user multiple-input single-output (MISO) interference channel (IC), consisting of two transmitter (TX) - receiver (RX) pairs (or else links). The TXs employ multiple antennas and the RXs a single antenna. The transmissions are concurrent and

---

The authors are with the Communication Systems Division, Department of Electrical Engineering (ISY), Linköping University, SE-581 83 Linköping, Sweden (e-mail: {lindblom,karipidis,erik.larsson}@isy.liu.se)

This work has been supported in part by the Swedish Research Council (VR), the Swedish Foundation of Strategic Research (SSF), and the Excellence Center at Linköping-Lund in Information Technology (ELLIIT). This work has been performed in the framework of the European research project SAPHYRE, which is partly funded by the European Union under its FP7 ICT Objective 1.1 - The Network of the Future. E. G. Larsson is a Royal Swedish Academy of Sciences (KVA) Research Fellow supported by a grant from Knut and Alice Wallenberg Foundation.

Part of this work was presented at the Asilomar Conference 2009 [1].

cochannel; hence, they interfere with each other. We assume that the channels are flat and slow fading. The latter means that the coherence time of the channels is longer than the codeword length. We assume that TX$_i$ encodes data at rate R_i. If the channels are in fading states that cannot support this rate, the decoding error probability cannot be arbitrarily small and the link is in *outage* [2, Ch. 5]. The fundamental question raised is which rates can be achieved for given specifications on the outage probabilities of the links, i.e. how to define the *outage* rate region?

Previous work on the MISO IC rate regions has focused on scenarios without the possibility of allowing the links to be in outage; specifically, on the achievable *instantaneous* and *ergodic* rate regions. In [3], the authors characterized the transmit strategies, which yield operating points on the outer boundary of the instantaneous rate region. This refers to the scenario that the TXs have instantaneous channel state information (CSI), i.e. they perfectly know the realizations of the channel vectors. In [4], the characterization in [3] was extended to the ergodic rate region. There, the TXs have statistical CSI, i.e, they assume that the channels are zero-mean complex Gaussian random variables with known covariance matrices. The ergodic rate is a long-term achievable rate, averaged over the time-varying channel and requires coding across an infinite number of channel realizations. However, for some applications (e.g. real-time), we cannot tolerate these coding delays. If we accept that the transmission is in outage during severe fading, then we can achieve higher rates when the channel conditions are good. For some applications, e.g. voice or video communications, we can tolerate some data loss without appreciably degrading the call quality.

The outage probability for a single-user multi-antenna link with statistical CSI was studied in [5]. For the scenario of spatially white channel vectors and very low signal-to-noise ratio (SNR), it was shown that it is optimal for the TX to use only some of its antennas. Also, a scheme was proposed to find locally-optimal power allocations when the channel vectors are correlated.

In multi-user systems, such as those modeled via the IC, broadcast channel (BC), and multiple-access channel (MAC), one can consider *individual* or *common* outage. By individual outage we refer to the event that a specific user is unable to communicate with its desired rate. For this scenario, there is an outage probability specification for each link. That is, one link might be declared in outage when others support their desired rates. Common outage is declared if the rate of at least one link cannot be supported (see, e.g. [6] for the MAC). Therefore, the common outage probability is specified for the entire multi-user system. Common outage might be of interest in applications where the transmitted information is useful only when all RXs can obtain it simultaneously [7], e.g., multicast channels [8].

All studies so far of the outage rate regions have been restricted to the single-antenna BC and MAC [6], [7], [9], [10]. The outage capacity regions for the BC were studied in [7] for the case of instantaneous CSI and bounded time-averaged total transmit power. First, outage regions were determined for superposition coding (with and without successive decoding) and time division (TD). Superposition coding implies simultaneous and cochannel transmissions, whereas TD means that transmissions are separated in time. Second, outage capacity regions were determined for both individual and common outage probability specifications. It was shown that the outage capacity regions are implicitly obtained from the outage probability regions for a given rate vector. For different spectrum sharing methods and given rate points, power allocations that bound the outage probabilities were found.

Outage capacity regions for the MAC were studied in [6], again for instantaneous CSI. Given a required rate and an average power constraint, a successive decoding strategy and an optimal power allocation policy for achieving points on the boundary were determined. Both common and individual outage were discussed. In [10], outage capacity regions were studied for a cognitive radio network that constitutes a MAC operating on the same spectrum with an existing primary network. Under an interference power constraint together with the individual transmit power constraint of each user, the outage capacity regions for the cognitive MAC were defined for individual and common outage specifications. The optimal power allocation strategies that achieve the boundary points of the regions were derived by maximizing the usage (i.e. non-outage) probability for given rate vectors. The case of statistical TX CSI, with channels modeled as i.i.d. zero-mean Gaussian with unit variance, was treated in [9].

Up to our knowledge, there are no published results on definitions and characterizations of the outage rate regions for the IC. However, various methods have been proposed to find specific operating points and the enabling transmission schemes. For example, in [11], the optimal power allocations were found, given transmission rates and outage probability specifications. Also, in [12], for given rates, the outage probabilities were minimized taking into account the cost of power consumption. The results of [11] were derived under the assumption of statistical CSI at the TXs with channels modeled as zero-mean Gaussian with general variance. The same channel model was considered in [13], where it was assumed that the RXs can decode interference and rate splitting was used. The asymptotic behavior of the outage probability in the interference-limited regime was studied. Upper and lower bounds on the exponent of the outage probability for the IC were derived. The two-user SISO IC with mixed channel knowledge was studied in [12], where it was assumed that each TX has perfect knowledge of the direct channel and statistical knowledge of the forward crosstalk channel. The power and rate allocation problem was considered based on the throughput accounting for the outage event. The proposed algorithms were based on either Bayesian games or optimization. In [14], the results in [1] were used to solve the weighted sum-rate maximization under outage constraints for the MISO IC. It was assumed that the TXs have statistical CSI and the problem was solved via a convex optimization approach.

A. Contributions and Organization

In this paper, we propose a two-fold generalization of the outage rate regions definitions for multiuser systems. Not only we consider the IC, which is a generalization of the BC and MAC, but we do so for multi-antenna transmitters. In Section II, we describe the system model. Our contributions are organized as follows:

- In Sections III-A and III-B, we consider the statistical CSI case and propose definitions for the common and individual outage rate regions, respectively. We discuss the interpretations of the regions. Compared to [1], we extend the single-stream transmission scheme to multi-stream.
- In Section III-C, we show how the outage probability can be obtained in closed-form.
- In Sections IV-A and IV-B, we consider the instantaneous CSI case and propose definitions for the common and individual outage rate regions, respectively. We discuss the interpretations of the regions. Compared to [1], we propose a definition for the individual outage region.
- In Section V, we give a numerical example and observe a number of relations between the regions. We formalize and prove these relations.

Finally, in Section VI, we summarize the conclusions of this study.

B. Notation

Boldface uppercase letters, e.g. $\boldsymbol{X}$, denote matrices while boldface lowercase letters, e.g. $\boldsymbol{x}$, denote column vectors. $\{\cdot\}^H$ denotes the Hermitian (complex conjugate) transpose of a vector or matrix. $\mathrm{trace}\{\boldsymbol{X}\}$ and $\mathrm{rank}\{\boldsymbol{X}\}$ denote the trace and rank of a matrix $\boldsymbol{X}$, respectively. $\mathrm{diag}\{\boldsymbol{x}\}$, is the diagonal matrix, whose diagonal elements are the elements in a vector $\boldsymbol{x}$. $\mathrm{E}\{\cdot\}$ is the expectation operator. By $\boldsymbol{X} \succeq 0$ we mean that $\boldsymbol{X}$ is a positive semi-definite matrix. We say that a tall matrix $\boldsymbol{U}$ is semi-unitary if $\boldsymbol{U}^H\boldsymbol{U} = \boldsymbol{I}$ and $\boldsymbol{U}\boldsymbol{U}^H \neq \boldsymbol{I}$, where $\boldsymbol{I}$ is the identity matrix of appropriate dimension. The Euclidean norm of a vector $\boldsymbol{x}$ is denoted $\|\boldsymbol{x}\|$. By $\boldsymbol{x} \sim \mathcal{CN}(\boldsymbol{0}, \boldsymbol{Q})$ we say that $\boldsymbol{x}$ is a zero-mean complex-symmetric Gaussian random vector with covariance matrix $\boldsymbol{Q}$. We define the index set $\mathcal{I} \triangleq \{(1,2),(2,1)\}$.

II. System Model

We consider the two-user MISO IC, where the receivers treat the interference as additive Gaussian noise, the transmit power is bounded, the channels experience slow fading and a non-zero probability of outage is allowed. We assume that each TX employs n antenna elements. TX$_i$ transmits a vector $\boldsymbol{x}_i \in \mathbb{C}^n \sim \mathcal{CN}(\boldsymbol{0}, \boldsymbol{\Psi}_i)$, with covariance matrix $\boldsymbol{\Psi}_i = \mathrm{E}\big\{\boldsymbol{x}_i\boldsymbol{x}_i^H\big\}$. The matched-filtered symbol-sampled complex baseband data received by RX$_i$ is modeled as

$$y_i = \boldsymbol{h}_{ii}^H\boldsymbol{x}_i + \boldsymbol{h}_{ji}^H\boldsymbol{x}_j + e_i, \qquad (i,j) \in \mathcal{I}, \tag{1}$$

where e_i is i.i.d. zero-mean Gaussian noise with variance σ_i^2. The conjugated[1] channel vector $\boldsymbol{h}_{ij} \in \mathbb{C}^n$ between TX$_i$ and RX$_j$ is modeled as $\boldsymbol{h}_{ij} \sim \mathcal{CN}(\boldsymbol{0}, \boldsymbol{Q}_{ij})$. We assume that the channel vectors $\{\boldsymbol{h}_{ij}\}_{i,j=1}^2$ are statistically independent.

Due to regulatory and hardware constraints, the transmit power is constrained. Without loss of generality we set this bound to

$$\mathrm{E}\big\{\|\boldsymbol{x}_i\|^2\big\} = \mathrm{E}\big\{\mathrm{trace}\big\{\boldsymbol{x}_i\boldsymbol{x}_i^H\big\}\big\} = \mathrm{trace}\{\boldsymbol{\Psi}_i\} \leq 1. \tag{2}$$

Hence, the set of feasible transmit covariance matrices $\mathcal{W}_{\boldsymbol{\Psi}}$ consists of all positive semi-definite

---

[1] We incorporate conjugation in definition to simplify subsequent notation.

$n \times n$ matrices whose trace is at most one, i.e.

$$\mathcal{W}_{\boldsymbol{\Psi}} \triangleq \{\boldsymbol{\Psi} \in \mathbb{C}^{n \times n} : \boldsymbol{\Psi} \succeq \mathbf{0},\ \ \mathrm{trace}\{\boldsymbol{\Psi}\} \leq 1\}. \tag{3}$$

The transmit covariance matrix $\boldsymbol{\Psi}_i$ can potentially be of any $\mathrm{rank}\{\boldsymbol{\Psi}_i\} \leq n$. The optimal choice of number N_i of transmitted streams depends on the CSI available at TX$_i$. For instantaneous CSI, single-stream transmission, i.e. $N_i = 1$, is optimal [15] and this means that $\boldsymbol{\Psi}_i$ is rank-one. However, for statistical CSI, multi-stream transmission, i.e. $N_i \geq 1$, is in general optimal [16]. In principle, the number of transmitted streams may be any positive integer. Without loss of generality, we can assume that $N_i \leq n$. If we have more than n streams, then stream $n{+}1$ must be a linear combination of streams $1, \ldots, n$. Hence, equivalently to transmitting stream $n+1$, streams $1, \ldots, n$ could be modified. The notation of the rate expression differs somewhat between the multi-stream and single-stream scenarios; therefore, we present them separately.

A. *Multi-Stream Transmission*

In this section, we illustrate how the symbol vector $\boldsymbol{x}_i \sim \mathcal{CN}(\mathbf{0}, \boldsymbol{\Psi}_i)$ is constructed [5]. TX$_i$ splits the incoming data stream s_i into N_i parallel data streams $s_{i,1}, \ldots, s_{i,N_i}$. Data stream l of TX$_i$, $s_{i,l}$, is then scaled by a factor $\sqrt{p_{i,l}}$ and a unit-norm beam-shaping vector $\boldsymbol{u}_{i,l}$. We assume that the vectors $\boldsymbol{u}_{i,1}, \ldots, \boldsymbol{u}_{i,N_i}$ are orthogonal. This scheme is depicted in Fig. 1. We define $\boldsymbol{w}_{i,l} \triangleq \sqrt{p_{i,l}}\boldsymbol{u}_{i,l}$ to be the effective beamforming vector of stream l of TX$_i$. Summing up the parallel weighted streams, we get the transmitted vector

$$\boldsymbol{x}_i = \sum_{l=1}^{N_i} \sqrt{p_{i,l}}\boldsymbol{u}_{i,l} s_{i,l} = \boldsymbol{P}_i^{1/2}\boldsymbol{U}_i\boldsymbol{s}_i, = \boldsymbol{W}_i\boldsymbol{s}_i = \sum_{l=1}^{N_i} \boldsymbol{w}_{i,l} s_{i,l}, \tag{4}$$

where $\boldsymbol{P}_i = \mathrm{diag}\{p_{i,1}, \ldots, p_{i,N_i}\}$, $\boldsymbol{U}_i = [\boldsymbol{u}_{i,1}, \ldots, \boldsymbol{u}_{i,N_i}]$ is a semi-unitary matrix, $\boldsymbol{s}_i = [s_{i,1}, \ldots, s_{i,N_i}]^T$ is the vector of transmitted symbols, and $\boldsymbol{W} = [\boldsymbol{w}_{i,1}, \ldots, \boldsymbol{w}_{i,N_i}]$.

Assuming that $\mathrm{E}\{\boldsymbol{s}_i\boldsymbol{s}_i^H\} = \boldsymbol{I}$, i.e. the streams are statistically independent with unit average power, we have

$$\boldsymbol{\Psi}_i = \mathrm{E}\{\boldsymbol{x}_i\boldsymbol{x}_i^H\} = \mathrm{E}\{\boldsymbol{W}_i\boldsymbol{s}_i\boldsymbol{s}_i^H\boldsymbol{W}_i^H\} = \boldsymbol{W}_i\boldsymbol{W}_i^H = \boldsymbol{U}_i\boldsymbol{P}_i\boldsymbol{U}_i^H. \tag{5}$$

The power constraint (2) can be rewritten as

$$\mathrm{E}\big\{\|\boldsymbol{x}_i\|^2\big\} = \mathrm{trace}\{\boldsymbol{\Psi}_i\} = \mathrm{trace}\big\{\boldsymbol{U}_i\boldsymbol{P}_i\boldsymbol{U}_i^H\big\} = \mathrm{trace}\{\boldsymbol{P}_i\} = \sum_{l=1}^{N_i} p_{i,l} \leq 1. \tag{6}$$

Assuming that RX$_i$ treats the signal from TX$_j$ as additive noise, the achievable rate, in bits per channel use, of link i as a function of the channel vectors and transmit covariance matrices is given by

$$R_i(\boldsymbol{h}_{ii}, \boldsymbol{h}_{ji}, \boldsymbol{\Psi}_i, \boldsymbol{\Psi}_j) = \log_2\left(1 + \frac{\boldsymbol{h}_{ii}^H\boldsymbol{\Psi}_i\boldsymbol{h}_{ii}}{\boldsymbol{h}_{ji}^H\boldsymbol{\Psi}_j\boldsymbol{h}_{ji} + \sigma_i^2}\right). \tag{7}$$

The rate in (7) is achieved when RX$_i$ uses multiuser detection to decode the streams intended for it and treats the interfering streams (from TX$_j$) as noise. It is further assumed that TX$_i$ performs an appropriate rate and power allocation over the streams $s_{i,1}, \ldots, s_{i,N_i}$. In order to illustrate this point, we sum up interference and noise into a new variable $z_i \triangleq \boldsymbol{h}_{ji}^H\boldsymbol{x}_j + e_i$ and get

$$y_i = \boldsymbol{h}_{ii}^H\boldsymbol{x}_i + z_i = \sum_{l=1}^{N_i} \boldsymbol{h}_{ii}^H\boldsymbol{w}_{i,l}s_{i,l} + z_i = \sum_{l=1}^{N_i} \alpha_{i,l}s_{i,l} + z_i, \tag{8}$$

where $\alpha_{i,l} \triangleq \boldsymbol{h}_{ii}^H\boldsymbol{w}_{i,l}$. We can interpret (8) as the received signal in a MAC of N_i TXs, each transmitting a single stream, where $s_{i,l}$ is the symbol from TX$_l$ and $\alpha_{i,l}$ is the gain of the channel between TX$_l$ and the receiver. By performing multiuser detection, we can achieve the sum-capacity [2, Ch. 6]

$$C_{\text{sum}} = \log_2\left(1 + \frac{\sum_{l=1}^{N_i}|\alpha_{i,l}|^2}{\mathrm{E}\{|z_i|^2\}}\right). \tag{9}$$

B. Single-Stream Transmission

When single-stream transmission is used, the transmitted symbol vector can be written as $\boldsymbol{x}_i = \boldsymbol{w}_i s_i$, which gives us $\boldsymbol{\Psi}_i = \boldsymbol{w}_i\boldsymbol{w}_i^H$. In this case, the power constraint (6) reads

$$\mathrm{E}\big\{\|\boldsymbol{x}_i\|^2\big\} = \mathrm{E}\big\{|s_i|^2\big\}\,\|\boldsymbol{w}_i\|^2 = \|\boldsymbol{w}_i\|^2 \leq 1. \tag{10}$$

Hence, we get the feasible set of beamforming vectors

$$\mathcal{W}_{\boldsymbol{w}} \triangleq \{\boldsymbol{w} \in \mathbb{C}^n : \|\boldsymbol{w}\|^2 \leq 1\}. \tag{11}$$

Then, the maximum achievable rate of link i in bits per channel use, (7), can be written as

$$R_i(\boldsymbol{h}_{ii}, \boldsymbol{h}_{ji}, \boldsymbol{w}_i, \boldsymbol{w}_j) = \log_2\left(1 + \frac{\boldsymbol{h}_{ii}^H \operatorname{E}\{\boldsymbol{x}_i \boldsymbol{x}_i^H\} \boldsymbol{h}_{ii}}{\boldsymbol{h}_{ji}^H \operatorname{E}\{\boldsymbol{x}_j \boldsymbol{x}_j^H\} \boldsymbol{h}_{ji} + \sigma_i^2}\right) = \log_2\left(1 + \frac{|\boldsymbol{h}_{ii}^H \boldsymbol{w}_i|^2}{|\boldsymbol{h}_{ji}^H \boldsymbol{w}_j|^2 + \sigma_i^2}\right). \tag{12}$$

III. OUTAGE RATE REGIONS FOR STATISTICAL CSI

In this section, we assume that the TXs have statistical CSI; hence, they can only adapt their transmit covariance matrices to the statistical distributions of the channels. When a TX chooses a rate, it continues transmitting with this rate as if the RX is able to correctly decode it, no matter if the communication is actually in outage or not. Under these assumptions, we would like to find the outage rate region, which consists of all the rate pairs that can be achieved given common or individual outage specifications.

We determine the outage rate region in two steps. Given a pair of transmit covariance matrices, the rates in (7) are functions of the random channels; hence, they are random variables. Using these transmit covariance matrices, we find the set of rate points which are achievable for a specific outage probability specification. It is apparent that each choice of transmit covariance matrices yields a different rate region, that we denote $\mathcal{R}_{\boldsymbol{\Psi}}$. Second, we define the outage rate region as the union of all these regions $\mathcal{R}_{\boldsymbol{\Psi}}$. In the following, we consider the cases of common and individual outage probabilities, in Sections III-A and III-B, respectively.

A. *Common Outage Rate Region for Statistical CSI*

We denote by $\mathcal{R}_{\text{stat}}^{\text{com}}(\epsilon)$ the sought common outage rate region for statistical CSI, where $\epsilon > 0$ is the common outage probability specification. We say that a rate point (r_1, r_2) is in $\mathcal{R}_{\text{stat}}^{\text{com}}(\epsilon)$ if there exists a pair of transmit covariance matrices $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, such that r_1 and r_2 are achieved with probability at least $1 - \epsilon$. That is, the chance is at least $1 - \epsilon$ that the channels are in fading states which enable the links to operate simultaneously at rates r_1 and r_2. In this case, an outage is declared when either (or both) RX(s) cannot correctly decode the received data.

Let us assume a specific choice of transmit covariance matrices $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$. Then, using these matrices, the common usage (i.e. non-outage) probability of rate point (r_1, r_2) is

$$U_{\text{com}}^{\text{stat}}(r_1, r_2, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \triangleq \Pr\left\{ \bigcap_{(i,j)\in\mathcal{I}} \{R_i(\boldsymbol{h}_{ii}, \boldsymbol{h}_{ji}, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) > r_i\} \middle| \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2 \right\}. \tag{13}$$

With this specific $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, a common outage rate region is achieved, consisting of the rate points that have common usage probability at least $1-\epsilon$, i.e.

$$\mathcal{R}^{\text{com}}_{\boldsymbol{\Psi}}(\epsilon, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) = \left\{(r_1, r_2) : U^{\text{stat}}_{\text{com}}(r_1, r_2, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \geq 1-\epsilon\right\}. \tag{14}$$

Considering all possible choices for $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, the *overall* common outage rate region for statistical CSI is the union of the regions in (14).

Definition 1. Let $\epsilon > 0$ denote the *common* outage probability specification. The common outage rate region for statistical CSI is the set of rate points (r_1, r_2) that can be achieved with probability at least $1-\epsilon$, using a pair of feasible transmit covariance matrices $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, i.e.

$$\mathcal{R}^{\text{com}}_{\text{stat}}(\epsilon) = \bigcup_{(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \in \mathcal{W}^2_{\boldsymbol{\Psi}}} \left\{(r_1, r_2) : U^{\text{stat}}_{\text{com}}(r_1, r_2, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \geq 1-\epsilon\right\}. \tag{15}$$

B. Individual Outage Rate Region for Statistical CSI

We denote by $\mathcal{R}^{\text{ind}}_{\text{stat}}(\epsilon_1, \epsilon_2)$ the sought individual outage rate region for statistical CSI, where $\epsilon_1 > 0$ and $\epsilon_2 > 0$ are the individual outage probability specifications for links 1 and 2, respectively. A rate point (r_1, r_2) is in $\mathcal{R}^{\text{ind}}_{\text{stat}}(\epsilon_1, \epsilon_2)$, if there exists a pair of transmit covariance matrices such that r_1 and r_2 are achieved with probabilities at least $1-\epsilon_1$ and $1-\epsilon_2$, respectively.

Let us denote the individual usage probability of link i, for a specific rate value r_i and pair of transmit covariance matrices $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, as

$$U^{\text{stat}}_i(r_i, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \triangleq \Pr\{R_i(\boldsymbol{h}_{ii}, \boldsymbol{h}_{ji}, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \geq r_i | \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2\}, \quad (i,j) \in \mathcal{I}. \tag{16}$$

With this specific $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, an individual outage rate region is achieved, consisting of the rate points that have individual usage probabilities at least $1-\epsilon_i$,

$$\mathcal{R}^{\text{ind}}_{\boldsymbol{\Psi}}(\epsilon_1, \epsilon_2, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) = \{(r_1, r_2) : U^{\text{stat}}_1(r_1, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \geq 1-\epsilon_1,\ \ U^{\text{stat}}_2(r_2, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \geq 1-\epsilon_2\}. \tag{17}$$

Considering all possible choices for $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, the *overall* individual outage rate region for statistical CSI is the union of the regions in (17). Note that the region $\mathcal{R}^{\text{ind}}_{\boldsymbol{\Psi}}$ defined in (17) has a rectangular shape. Its north-east corner is the point (r_1, r_2) where the usage probabilities in (17) are exactly $1-\epsilon_1$ and $1-\epsilon_2$. On the contrary, the common outage rate region $\mathcal{R}^{\text{com}}_{\boldsymbol{\Psi}}$ defined in (14) is not rectangular.

Definition 2. Let $\epsilon_1 > 0$ and $\epsilon_2 > 0$ denote the *individual* outage probability specifications. The individual outage rate region for statistical CSI is the set of rate points (r_1, r_2) such that r_1 and r_2 are achieved with probabilities at least $1 - \epsilon_1$ and $1 - \epsilon_2$, respectively, using a pair of feasible transmit covariance matrices $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, i.e.

$$\mathcal{R}_{\text{stat}}^{\text{ind}}(\epsilon_1, \epsilon_2) = \bigcup_{(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \in \mathcal{W}_{\boldsymbol{\Psi}}^2} \{(r_1, r_2) : U_1^{\text{stat}}(r_1, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \geq 1 - \epsilon_1, \;\; U_2^{\text{stat}}(r_2, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \geq 1 - \epsilon_2\}. \tag{18}$$

C. Usage Probabilities for Statistical CSI

In this section, we discuss how to to find the usage probabilities in closed-form. We begin by showing that the common usage probability is equal to the product of the individual ones. We see from (7) that, for a specific $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, the rates of links 1 and 2 depend on different pairs of channel vectors. Since the channel vectors are independent, the rates are independent too. Hence, the events intersected in the probability term of (13) are independent and we can use (16) to rewrite (13) as a product of the individual usage probabilities, i.e,

$$U_{\text{com}}^{\text{stat}}(r_1, r_2, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) = U_1^{\text{stat}}(r_1, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) U_2^{\text{stat}}(r_2, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2). \tag{19}$$

Note that (19) holds for any distribution of the channels, provided they are independent.

Due to (19), we can focus on the individual usage probability for link i. We use (7) and exploit the knowledge of channels' distributions to elaborate (16) as

$$\begin{aligned} U_i^{\text{stat}}(r_i, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) &= \Pr\left\{\log_2\left(1 + \frac{\boldsymbol{h}_{ii}^H \boldsymbol{\Psi}_i \boldsymbol{h}_{ii}}{\boldsymbol{h}_{ji}^H \boldsymbol{\Psi}_j \boldsymbol{h}_{ji} + \sigma_i^2}\right) > r_i\right\} \\ &= \Pr\left\{\boldsymbol{h}_{ii}^H \boldsymbol{\Psi}_i \boldsymbol{h}_{ii} - (2^{r_i} - 1)\boldsymbol{h}_{ji}^H \boldsymbol{\Psi}_j \boldsymbol{h}_{ji} > (2^{r_i} - 1)\sigma_i^2\right\} \\ &= \Pr\left\{\boldsymbol{h}_{ii}^H \boldsymbol{\Psi}_i \boldsymbol{h}_{ii} - \gamma_i \boldsymbol{h}_{ji}^H \boldsymbol{\Psi}_j \boldsymbol{h}_{ji} > \gamma_i \sigma_i^2\right\}. \end{aligned} \tag{20}$$

In (20), we defined $\gamma_i \triangleq 2^{r_i} - 1$ to be the signal-to-interference-plus-noise ratio (SINR) that yields, due to (7), rate r_i. In Appendix A, we explain how one can derive the closed-form expression of (20). Using that result, we can write (20) as

$$U_i^{\text{stat}}(\gamma_i, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) = \sum_{k=1}^{N_i} \sum_{l=1}^{N_j} \frac{\chi_{ii,k} \chi_{ji,l} \lambda_{ii,k}}{\lambda_{ii,k} + \gamma_i \lambda_{ji,l}} \exp\left(-\frac{\gamma_i \sigma_i^2}{\lambda_{ii,k}}\right), \tag{21}$$

where $\lambda_{ji,k}$ is the kth eigenvalue of $\boldsymbol{Q}_{ji}^{1/2}\boldsymbol{\Psi}_j\boldsymbol{Q}_{ji}^{1/2}$ and

$$\chi_{ji,k} \triangleq \prod_{n=1,n\neq k}^{N_j} \frac{\lambda_{ji,k}}{\lambda_{ji,k}-\lambda_{ji,n}}. \tag{22}$$

The result in (21) holds under the assumption that the non-zero eigenvalues of the matrices of the form $\boldsymbol{Q}^{1/2}\boldsymbol{\Psi}\boldsymbol{Q}^{1/2}$ are distinct. The derivation of (21) capitalizes on the fact that the random variables of the form $\boldsymbol{h}^H\boldsymbol{\Psi}\boldsymbol{h}$ are hypoexponentially distributed. For the single-stream transmission case, (21) can be written as

$$U_i^{\text{stat}}(\gamma_i,\boldsymbol{w}_1,\boldsymbol{w}_2) = \frac{\boldsymbol{w}_i^H\boldsymbol{Q}_{ii}\boldsymbol{w}_i}{\boldsymbol{w}_i^H\boldsymbol{Q}_{ii}\boldsymbol{w}_i+\gamma_i\boldsymbol{w}_j^H\boldsymbol{Q}_{ji}\boldsymbol{w}_j} e^{-\frac{\gamma_i\sigma_i^2}{\boldsymbol{w}_i^H\boldsymbol{Q}_{ii}\boldsymbol{w}_i}}. \tag{23}$$

The quadratic terms of the form $\boldsymbol{w}^H\boldsymbol{Q}\boldsymbol{w}$ are the mean of the random variables of the form $\boldsymbol{h}^H\boldsymbol{\Psi}\boldsymbol{h}$. For single-stream beamforming, we write this as $\boldsymbol{h}^H\boldsymbol{w}\boldsymbol{w}^H\boldsymbol{h}$, which is exponentially distributed with mean $\boldsymbol{w}^H\boldsymbol{Q}\boldsymbol{w}$.

IV. OUTAGE RATE REGION FOR INSTANTANEOUS CSI

In this section, we assume that the TXs have instantaneous CSI so that they can adapt their beamforming vectors to the current fading state. Based on this, we provide two definitions for the outage rate region of the two-user MISO IC with instantaneous CSI. We consider the cases of common and individual outage probabilities, in Sections IV-A and IV-B, respectively.

We again follow a two-step approach, but now we first consider a given realization of the channels; thus, the rates in (12) are functions only of the beamforming vectors. Then, for this realization, we define the region $\mathcal{R}_{\boldsymbol{h}}$ consisting of the rate points that can be achieved using all possible pairs of beamforming vectors, i.e.

$$\mathcal{R}_{\boldsymbol{h}}(\boldsymbol{h}_{11},\boldsymbol{h}_{21},\boldsymbol{h}_{22},\boldsymbol{h}_{12}) = \bigcup_{(\boldsymbol{w}_1,\boldsymbol{w}_2)\in\mathcal{W}_{\boldsymbol{w}}^2} \left(R_1(\boldsymbol{h}_{11},\boldsymbol{h}_{21},\boldsymbol{w}_1,\boldsymbol{w}_2), R_2(\boldsymbol{h}_{22},\boldsymbol{h}_{12},\boldsymbol{w}_1,\boldsymbol{w}_2)\right). \tag{24}$$

The instantaneous rate region of (24) has been the topic of many previous studies; see, e.g. [3] and references therein. We denote the maximum rate for link i as

$$S_i(\boldsymbol{h}_{ii}) \triangleq \log_2\left(1+\|\boldsymbol{h}_{ii}\|^2/\sigma_i^2\right). \tag{25}$$

This is the rate that corresponds to the point where the outer boundary of $\mathcal{R}_{\boldsymbol{h}}$ meets the ith rate axis. It is achieved when TX$_i$ uses the maximum-ratio beamforming vector, i.e. $\boldsymbol{w}_i = \boldsymbol{h}_{ii}/\|\boldsymbol{h}_{ii}\|$, and TX$_j$ creates no interference to RX$_i$, either by not transmitting or by transmitting into the nullspace of $\boldsymbol{h}_{ji}$; see, e.g. [3].

A. Common Outage Rate Region for Instantaneous CSI

We denote by $\mathcal{R}^{\text{com}}_{\text{inst}}(\epsilon)$ the sought common outage rate region for instantaneous CSI. We say that a rate point (r_1, r_2) is in $\mathcal{R}^{\text{com}}_{\text{inst}}(\epsilon)$, if the chance is at least $1-\epsilon$, that the fading state is such that operation at this rate point is possible. Here, being able to operate means that we can find a pair of feasible beamforming vectors that yields the rate point in question.

Contrary to in Section III, we define the usage probabilities for instantaneous CSI taking into account all feasible pairs of beamforming vectors. It is apparent that each fading state yields a different achievable instantaneous rate region $\mathcal{R}_{\boldsymbol{h}}$, defined in (24). Since $\mathcal{R}_{\boldsymbol{h}}$ is a function of the random channels, it may be seen as a random variable. Drawing an arbitrary realization of $\mathcal{R}_{\boldsymbol{h}}$, the common usage probability of a rate point (r_1, r_2) is the probability that this point lies within this realization, i.e.

$$U^{\text{inst}}_{\text{com}}(r_1, r_2) \triangleq \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}. \tag{26}$$

Definition 3. Let $\epsilon > 0$ denote the common outage probability specification. The common outage rate region for instantaneous CSI is the set of all rate points (r_1, r_2) that can be achieved with probability at least $1-\epsilon$, using a pair of feasible beamforming vectors $(\boldsymbol{w}_1, \boldsymbol{w}_2)$, i.e.

$$\mathcal{R}^{\text{com}}_{\text{inst}}(\epsilon) = \left\{(r_1, r_2) : U^{\text{inst}}_{\text{com}}(r_1, r_2) \geq 1-\epsilon\right\}. \tag{27}$$

B. Individual Outage Rate Region for Instantaneous CSI

We denote by $\mathcal{R}^{\text{ind}}_{\text{inst}}(\epsilon_1, \epsilon_2)$ the sought individual outage rate region for instantaneous CSI. At first glance, one might be misled to give the following straightforward definition for the individual rate region: "A point (r_1, r_2) is in the region, if there is a chance of at least $1-\epsilon_1$ that channels are in a fading state such that $r_1 \leq S_1$, and there is a chance of at least $1-\epsilon_2$ that $r_2 \leq S_2$." This definition results in a rectangular region, whose north-east corner point is given by $\Pr\{r_i \leq S_i\} = 1-\epsilon_i,\ i = 1, 2$. This definition is flawed because it does not take into account the coupling of the links and looks at them as being parallel rather than constituting an interference channel.

Contrary to in Section III, we assume that when the rate of one link cannot be achieved, the corresponding TX is turned off. This is now possible due to the availability of instantaneous CSI at the TXs. In such an occasion, the other link experiences an interference-free environment and hence has increased chances of achieving its rate. In this context, the problem of interest is to determine how probable it is to achieve r_1 and r_2, i.e. how to define the individual usage probabilities for instantaneous CSI.

In the following, we focus on a given rate pair (r_1, r_2) and a realization of the region $\mathcal{R}_{\boldsymbol{h}}$. We need to determine whether the rates r_1 and r_2 are achievable. It can be either that none of them is achievable, or both of them are achievable, or only one of them is achievable. In order to formalize the answer, we introduce the flowchart in Fig. 2 and perform the following checks:

1) Is $r_1 > S_1$ and $r_2 > S_2$? If yes, we have case $\mathbb{A}$: none of r_1 and r_2 is achievable. That is, both links will be in outage, so both TXs are turned off.
2) Is $(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}$? If yes, we have case $\mathbb{B}$: both r_1 and r_2 are achievable. That is, there exists a pair of beamforming vectors that enables operation at the desired rate point.
3) Is $r_1 > S_1$ or $r_2 > S_2$? If $r_2 > S_2$, we have case $\mathbb{C}_1$: r_1 is achievable and TX$_2$ is turned off. If $r_1 > S_1$, we have case $\mathbb{C}_2$: r_2 is achievable and TX$_1$ is turned off. If neither $r_1 > S_1$ nor $r_2 > S_2$, we have case $\mathbb{D}$: both rates can be achieved, but not simultaneously. In this case, there is ambiguity; the channels are in fading states that can support any of the two rates, provided that only one link operates. Therefore, in this case the TX that would be on has to be chosen. In order to later define a region which is as large as possible, we make this binary choice at random. Otherwise, we can e.g. always decide in favor of link 1. The binary choice can be seen as the outcome of a coin flip.
4) What is the outcome of the coin flip? If heads, we have case $\mathbb{D}_1$: r_1 is achievable and TX$_2$ is turned off. If tails, we have case $\mathbb{D}_2$: r_2 is achievable and TX$_1$ is turned off.

The previous discussion reveals that link 1 can operate at rate r_1 if the fading states and coin outcome are such that they give either of the cases $\mathbb{B}$, $\mathbb{C}_1$, or $\mathbb{D}_1$. Similarly, link 2 can operate at rate r_2 in the cases $\mathbb{B}$, $\mathbb{C}_2$, or $\mathbb{D}_2$. Hence, the usage probabilities of link 1 and link 2 for instantaneous CSI are defined as

$$U_1^{\text{inst}}(r_1, r_2) \triangleq \Pr\{\mathbb{B}\} + \Pr\{\mathbb{C}_1\} + \Pr\{\mathbb{D}_1\} \quad \text{and} \tag{28}$$

$$U_2^{\text{inst}}(r_1, r_2) \triangleq \Pr\{\mathbb{B}\} + \Pr\{\mathbb{C}_2\} + \Pr\{\mathbb{D}_2\}. \tag{29}$$

In order to elaborate the usage probabilities, we express the probabilities of the cases $\mathbb{A}$–$\mathbb{D}$ as

$$\Pr\{\mathbb{A}\} \triangleq \Pr\{r_1 > S_1, r_2 > S_2\} = \Pr\{r_1 > S_1\} \Pr\{r_2 > S_2\}, \tag{30}$$

$$\Pr\{\mathbb{B}\} \triangleq \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}, \tag{31}$$

$$\Pr\{\mathbb{C}_1\} \triangleq \Pr\{r_1 \leq S_1, r_2 > S_2\} = \Pr\{r_1 \leq S_1\} \Pr\{r_2 > S_2\}, \tag{32}$$

$$\Pr\{\mathbb{C}_2\} \triangleq \Pr\{r_1 > S_1, r_2 \leq S_2\} = \Pr\{r_1 > S_1\} \Pr\{r_2 \leq S_2\}, \tag{33}$$

$$\Pr\{\mathbb{D}\} \triangleq \Pr\{r_1 \leq S_1, r_2 \leq S_2, (r_1, r_2) \notin \mathcal{R}_{\boldsymbol{h}}\}. \tag{34}$$

Note that in (30), (32), and (33), the equalities are true since the random variables S_1 and S_2 are independent. This is due to (25) and the assumption that the channels $\boldsymbol{h}_{11}$ and $\boldsymbol{h}_{22}$ are independent. The probabilities of the form $\Pr\{r_i \leq S_i(\boldsymbol{h}_{ii})\}$ can be computed in closed form, based on the results in Appendix A. This is because they can be rewritten, due to (25), as $\Pr\{\|\boldsymbol{h}_{ii}\|^2 \geq \gamma_i \sigma_i^2\}$ and $\|\boldsymbol{h}_{ii}\|^2$ is hypoexponentially distributed. The probability $\Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}$ can be numerically approximated by drawing a large number of regions $\mathcal{R}_{\boldsymbol{h}}$ and counting how many times the point (r_1, r_2) lies in them. In the following, we express (34) with respect to $\Pr\{r_i \leq S_i\}$ and $\Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}$. We note that if a point lies in $\mathcal{R}_{\boldsymbol{h}}$, then it also lies in the rectangle rate region with north-east point (S_1, S_2). Hence, we can write

$$\begin{aligned}
\Pr\{r_1 \leq S_1, r_2 \leq S_2\} &= \Pr\{r_1 \leq S_1, r_2 \leq S_2 | (r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\} \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\} \\
&\quad + \Pr\{r_1 \leq S_1, r_2 \leq S_2 | (r_1, r_2) \notin \mathcal{R}_{\boldsymbol{h}}\} \Pr\{(r_1, r_2) \notin \mathcal{R}_{\boldsymbol{h}}\} \\
&= \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\} + \Pr\{\mathbb{D}\} \Leftrightarrow \\
\Pr\{\mathbb{D}\} &= \Pr\{r_1 \leq S_1\} \Pr\{r_2 \leq S_2\} - \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}.
\end{aligned} \tag{35}$$

While traversing the flowchart, if we happen to be in $\mathbb{D}$, then we will terminate in either $\mathbb{D}_1$ or $\mathbb{D}_2$, depending on the outcome of the coin. The coin outcome depends on the bias that we define as $t \triangleq \Pr\{\text{heads}\}$. So, the probability of case $\mathbb{D}_1$ and $\mathbb{D}_2$ is

$$\Pr\{\mathbb{D}_1\} \triangleq t \Pr\{\mathbb{D}\} \quad \text{and} \tag{36}$$

$$\Pr\{\mathbb{D}_2\} \triangleq (1-t) \Pr\{\mathbb{D}\}. \tag{37}$$

It is apparent that, by construction, the cases $\mathbb{A}$, $\mathbb{B}$, $\mathbb{C}_1$, $\mathbb{C}_2$, $\mathbb{D}_1$, and $\mathbb{D}_2$, to which the flowchart terminates, are *mutually exclusive*. Using (30)–(33) and (35)–(37), one can easily verify that their probabilities sum up to one.

The usage probability of link 1 in (28) is expressed, due to (31), (32), (35), (36), and (37), as

$$U_1^{\text{inst}}(r_1, r_2, t) = \Pr\{r_1 \le S_1\} - (1-t)\big(\Pr\{r_1 \le S_1\} \Pr\{r_2 \le S_2\} - \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}\big) \tag{38}$$

$$= \Pr\{r_1 \le S_1\} - \Pr\{\mathbb{D}_2\}. \tag{39}$$

As mentioned in the beginning of this section, it is flawed to consider the usage probability of link 1 being equal to $\Pr\{r_1 \le S_1\}$. This would only hold if links 1 and 2 were parallel. Due to the coupling, the usage probability is actually lower by, as seen in (39), the probability that TX_2 is on, when either one of r_1 and r_2 can be achieved. By the same token, the usage probability of link 2 in (29) is expressed, due to (31), (33), (35), (36), and (37), as

$$U_2^{\text{inst}}(r_1, r_2, t) = \Pr\{r_2 \le S_2\} - t\big(\Pr\{r_1 \le S_1\} \Pr\{r_2 \le S_2\} - \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}\big) \tag{40}$$

$$= \Pr\{r_2 \le S_2\} - \Pr\{\mathbb{D}_1\}. \tag{41}$$

Using the usage probabilities in (38) and (40), we can formalize the definition of the individual outage rate region for instantaneous CSI. Note that the expressions of the usage probabilities depend on the coin bias t. By increasing the value of t, link 1 is prioritized over link 2. So, if there exists a $t \in [0,1]$ such that $U_1^{\text{inst}}(r_1, r_2, t) \ge 1 - \epsilon_1$ and $U_2^{\text{inst}}(r_1, r_2, t) \ge 1 - \epsilon_2$, then (r_1, r_2) belongs to the individual outage rate region.

Definition 4. Let $\epsilon_1 > 0$ and $\epsilon_2 > 0$ denote the individual outage probability specifications. Then, the individual outage rate region for instantaneous CSI is the set of all rate points (r_1, r_2) that yield usage probabilities for links 1 and 2, defined in (38) and (40), at least $1 - \epsilon_1$ and

$1-\epsilon_2$, respectively. Considering all possible values for the coin bias $t \in [0,1]$, it is

$$\mathcal{R}_{\text{inst}}^{\text{ind}}(\epsilon_1,\epsilon_2) = \bigcup_{0\le t\le 1} \left\{(r_1,r_2) : U_1^{\text{inst}}(r_1,r_2,t) \ge 1-\epsilon_1,\ \ U_2^{\text{inst}}(r_1,r_2,t) \ge 1-\epsilon_2\right\}. \tag{42}$$

C. Computing the Outage Rate Regions for Instantaneous CSI

Here, we sketch a method to determine numerically whether a rate point (r_1,r_2) is within an outage rate region for instantaneous CSI. The core ingredient of the method is the approximate calculation of the usage probabilities as sums of frequencies of occurrence for the cases $\mathbb{B}$–$\mathbb{D}$. We draw a large number of channel realizations. For each of them, we use the flowchart in Fig. 2 to determine which of the mutually exclusive cases occurs. For each of the cases, we have a counter that we increase according to the termination of the flowchart. We normalize the counters with the total number of trials to approximately obtain $\Pr\{\mathbb{B}\}$, $\Pr\{\mathbb{C}_1\}$, $\Pr\{\mathbb{C}_2\}$, and $\Pr\{\mathbb{D}\}$. Obviously, the accuracy of the approximation increases with the number of realizations. We use (36) and (37) to obtain $\Pr\{\mathbb{D}_1\}$ and $\Pr\{\mathbb{D}_2\}$, respectively, as functions of t. Then, due to (26), the common usage probability is given by $\Pr\{\mathbb{B}\}$ and comparing it with the common outage specification, we determine whether the rate point is in the common outage rate region. The individual usage probabilities are given by the sums in (28) and (29). If there exists a $t \in [0,1]$ that meets the individual outage specifications, we determine that the rate point is in the individual outage rate region.

We now illustrate with the anecdotal example in Fig. 3 the approximation of (28) and (29) by the frequencies of occurrence for the cases $\mathbb{B}$–$\mathbb{D}$. For three different channel realizations, we plot the respective instantaneous rate regions, $\mathcal{R}_{\boldsymbol{h}}^1$, $\mathcal{R}_{\boldsymbol{h}}^2$, and $\mathcal{R}_{\boldsymbol{h}}^3$. Also, we show four different rate points, $\boldsymbol{a}$, $\boldsymbol{b}$, $\boldsymbol{c}$, and $\boldsymbol{d}$ for which we would like to find the usage probabilities. The results are summarized in Table I. For point $\boldsymbol{a}$, the flowchart of Fig. 2 terminates at $\mathbb{B}$ for all three trial regions. Hence, the common and individual usage probabilities of $\boldsymbol{a}$ are equal to 1. For point $\boldsymbol{b}$, the flowchart terminates at $\mathbb{B}$ in the first and third trial and at $\mathbb{C}_2$ in the second trial. Therefore, the common usage probability of $\boldsymbol{b}$ is $2/3$ and the individual ones are $2/3$ and 1 for link 1 and 2, respectively. For point $\boldsymbol{c}$ and either of $\mathcal{R}_{\boldsymbol{h}}^1$ and $\mathcal{R}_{\boldsymbol{h}}^2$, we have case $\mathbb{D}$. That is, the flowchart terminates at $\mathbb{D}_1$ with probability t and at $\mathbb{D}_2$ with probability $1-t$. For $\mathcal{R}_{\boldsymbol{h}}^3$, the flowchart terminates at $\mathbb{B}$. Hence, the common usage probability of $\boldsymbol{c}$ is $1/3$ and the individual ones are $(1+2t)/3$ for link 1 and $(1+2(1-t))/3 = 1-2t/3$ for link 2. For point $\boldsymbol{d}$, the flowchart terminates at $\mathbb{A}$. Hence, the common and individual usage probabilities of $\boldsymbol{d}$ are zero.

V. COMPARISON OF REGIONS

In this section we compare the outage rate regions of Definitions 1–4. In Fig. 4, we depict the four regions for a set of randomly drawn full-rank channel covariance matrices. In the example, both TXs have $n = 5$ antennas and employ single-stream beamforming, even for the scenario of statistical CSI. The noise variance is $\sigma_i^2 = 0.5$ for both RXs and the outage specifications are set to $\epsilon = \epsilon_1 = \epsilon_2 = 0.1$. First, we discuss the methods we used to generate the regions in Fig. 4. Second, we make some observations from the graphical comparison of the regions. Third, we formalize these observations on the relations between the regions into two propositions.

We use exhaustive-search methods to generate the regions in Fig. 4. For statistical CSI we draw beamforming vectors randomly. For each pair of beamforming vectors, we determine the rate points that meet the outage specifications using (23). Then, we find the boundary via a brute-force search of the north-eastern rate points. For instantaneous CSI, we make a grid of rate points. Then, for each rate point, we use the method sketched in Section IV-C to determine whether the rate pair is in the outage rate region or not. We use the closed-form method in [17] to compute the outer boundary of the instantaneous rate region $\mathcal{R}_{\boldsymbol{h}}$ for each channel realization.

In the anecdotal example of Fig. 4, we see that the individual outage regions are larger than the common outage regions. Also, the instantaneous CSI regions are larger than the corresponding statistical CSI regions. As stated in the following propositions, these relations are true in general.

Proposition 1. *When $\epsilon_1 = \epsilon_2 = \epsilon$, the individual outage regions are larger that the common outage regions, i.e.,*

a) $\mathcal{R}_{\textit{stat}}^{\textit{com}}(\epsilon) \subseteq \mathcal{R}_{\textit{stat}}^{\textit{ind}}(\epsilon_1, \epsilon_2)$ *and*

b) $\mathcal{R}_{\textit{inst}}^{\textit{com}}(\epsilon) \subseteq \mathcal{R}_{\textit{inst}}^{\textit{ind}}(\epsilon_1, \epsilon_2)$.

Proof of Prop. 1a): Due to Definition 1, for any rate point $(r_1, r_2) \in \mathcal{R}_{\text{stat}}^{\text{com}}(\epsilon)$, there is a pair of transmit covariance matrices $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$ such that

$$U_{\text{com}}^{\text{stat}}(r_1, r_2, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \geq 1 - \epsilon. \tag{43}$$

This implies that $U_i^{\text{stat}}(r_i, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) \geq 1 - \epsilon$, $i = 1, 2$. Hence, $(r_1, r_2) \in \mathcal{R}_{\text{stat}}^{\text{ind}}(\epsilon_1, \epsilon_2)$. ■

Proof of Prop. 1b): For any rate point $(r_1, r_2) \in \mathcal{R}^{\text{com}}_{\text{inst}}(\epsilon)$, we have $U^{\text{inst}}_{\text{com}}(r_1, r_2) = \Pr\{\mathbb{B}\} \geq 1 - \epsilon$. From (28) and (29), we get that $U^{\text{inst}}_i(r_1, r_2, t) \geq 1 - \epsilon = 1 - \epsilon_i$, since $\Pr\{\mathbb{C}_i\} \geq 0$ and $\Pr\{\mathbb{D}_i\} \geq 0$. Hence, it follows that $(r_1, r_2) \in \mathcal{R}^{\text{ind}}_{\text{inst}}(\epsilon_1, \epsilon_2)$. ■

This statement is quite intuitive; the definition of common outage says that the entire IC is in outage when at least one of the links is in outage. Individual outage is less restrictive since it allows one link to be in outage while the other is not.

Proposition 2. *For given ϵ, ϵ_1, and ϵ_2, the instantaneous CSI regions are larger than the statistical CSI regions, i.e.,*

a) $\mathcal{R}^{\textit{com}}_{\textit{stat}}(\epsilon) \ \subseteq\ \mathcal{R}^{\textit{com}}_{\textit{inst}}(\epsilon)$ *and*
b) $\mathcal{R}^{\textit{ind}}_{\textit{stat}}(\epsilon_1, \epsilon_2) \ \subseteq\ \mathcal{R}^{\textit{ind}}_{\textit{inst}}(\epsilon_1, \epsilon_2)$.

Proof of Prop. 2a): If $(r_1, r_2) \in \mathcal{R}^{\text{com}}_{\text{stat}}(\epsilon)$, then there is a pair of transmit covariance matrices $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$ such that the common usage probability of (r_1, r_2) is at least $1 - \epsilon$. So, the probability is at least $1 - \epsilon$ that we get channel realizations for which there exists a pair $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$ yielding the rate pair (r_1, r_2). Hence, we have $(r_1, r_2) \in \mathcal{R}^{\text{com}}_{\text{inst}}(\epsilon)$. ■

Proof of Prop. 2b): First, we simplify notation by using R_i instead of $R_i(\boldsymbol{h}_{ii}, \boldsymbol{h}_{ji}, \boldsymbol{\Psi}_i, \boldsymbol{\Psi}_j)$. For all pairs of transmit covariance matrices $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$, we note that $\Pr\{r_i \leq R_i\} \leq \Pr\{r_i \leq S_i\}$, since S_i is the maximum rate we can achieve for a given realization of the channels.

We assume that $U^{\text{stat}}_i(r_i, \boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2) = \Pr\{r_i \leq R_i\} = 1 - \epsilon_i,\ i = 1, 2$, for a rate point (r_1, r_2) and a pair of transmit covariance matrices $(\boldsymbol{\Psi}_1, \boldsymbol{\Psi}_2)$. Hence, $(r_1, r_2) \in \mathcal{R}^{\text{ind}}_{\text{stat}}(\epsilon_1, \epsilon_2)$. We note that

$$\begin{aligned} 1 - \epsilon_1 &= \Pr\{r_1 \leq R_1\} \\ &= \Pr\{r_1 \leq R_1 | r_1 \leq S_1\} \Pr\{r_1 \leq S_1\} + \Pr\{r_1 \leq R_1 | r_1 > S_1\} \Pr\{r_1 > S_1\} \\ &= \Pr\{r_1 \leq R_1 | r_1 \leq S_1\} \Pr\{r_1 \leq S_1\} \end{aligned} \tag{44}$$

since $\Pr\{r_1 \leq R_1 | r_1 > S_1\} = 0$. Also, we can write (38) as

$$U^{\text{inst}}_1(r_1, r_2, t) = \Pr\{r_1 \leq S_1\} \left(1 - (1 - t) \Pr\{r_2 \leq S_2\} \left(1 - \frac{\Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}}{\Pr\{r_1 \leq S_1\} \Pr\{r_2 \leq S_2\}}\right)\right). \tag{45}$$

For r_2, we have expressions similar to (44) and (45).

We have to show that there exists a $t \in [0, 1]$ such that $U^{\text{inst}}_i(r_1, r_2, t) \geq 1 - \epsilon_i,\ i = 1, 2$. Then it follows that $(r_1, r_2) \in \mathcal{R}^{\text{ind}}_{\text{inst}}(\epsilon_1, \epsilon_2)$. Comparing (44) and (45), we see that they have the factor $\Pr\{r_1 \leq S_1\}$ in common. So, we show that there exists a $t \in [0, 1]$ such that

$$\Pr\{r_1 \leq R_1 | r_1 \leq S_1\} \leq 1 - (1-t) \Pr\{r_2 \leq S_2\} \left(1 - \frac{\Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}}{\Pr\{r_1 \leq S_1\} \Pr\{r_2 \leq S_2\}}\right), \quad (46)$$

$$\Pr\{r_2 \leq R_2 | r_2 \leq S_2\} \leq 1 - t \Pr\{r_1 \leq S_1\} \left(1 - \frac{\Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}}{\Pr\{r_1 \leq S_1\} \Pr\{r_2 \leq S_2\}}\right). \quad (47)$$

In order to simplify notation, we define $\alpha_i \triangleq \Pr\{r_i \leq R_i | r_i \leq S_i\}$, $\beta_i \triangleq \Pr\{r_i \leq S_i\}$, $i = 1, 2$, and $\eta \triangleq 1 - \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\} / (\Pr\{r_1 \leq S_1\} \Pr\{r_2 \leq S_2\})$. Now, we write (46) and (47) as

$$t \geq t_L \triangleq \frac{\beta_2 \eta - 1 + \alpha_1}{\beta_2 \eta}, \quad t \leq t_U \triangleq \frac{1 - \alpha_2}{\beta_1 \eta}. \quad (48)$$

Since $\alpha_i \leq 1$, we have $t_U \geq 0$ and $t_L \leq 1$. So, there exists a feasible t if we can verify that $t_L \leq t_U$. From (48) we have

$$t_L \leq t_U \quad \Leftrightarrow \quad \beta_1 \beta_2 \eta \leq \beta_1 (1 - \alpha_1) + \beta_2 (1 - \alpha_2). \quad (49)$$

From the definitions of β_1, β_2, and η, we have $\beta_1 \beta_2 \eta = \beta_1 \beta_2 - \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\}$. Also, we know that $\alpha_i \beta_i = 1 - \epsilon_i$. Hence, we write (49) as

$$\beta_1 \beta_2 \leq \Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\} + \beta_1 + \beta_2 + \epsilon_1 + \epsilon_2 - 2. \quad (50)$$

From (19) and Definition 1 we note that since $(r_1, r_2) \in \mathcal{R}^{\text{ind}}_{\text{stat}}(\epsilon_1, \epsilon_2)$ implies $(r_1, r_2) \in \mathcal{R}^{\text{com}}_{\text{stat}}(\epsilon_1 + \epsilon_2 - \epsilon_1 \epsilon_2)$. Using Proposition 2 a), we know that $(r_1, r_2) \in \mathcal{R}^{\text{com}}_{\text{inst}}(\epsilon_1 + \epsilon_2 - \epsilon_1 \epsilon_2)$. Hence, $\Pr\{(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}\} \geq 1 - \epsilon_1 - \epsilon_2 + \epsilon_1 \epsilon_2$. Therefore, it is sufficient to prove that

$$\beta_1 \beta_2 - \beta_1 - \beta_2 \leq \epsilon_1 \epsilon_2 - 1. \quad (51)$$

Since $\Pr\{r_i \leq S_i\} \geq \Pr\{r_i \leq R_i\} = 1 - \epsilon_i$, one can verify that $\beta_1 \beta_2 - \beta_1 - \beta_2$ cannot be larger than $\epsilon_1 \epsilon_2 - 1$. Hence, there exists a $t \in [0, 1]$ such that (46) and (47) are satisfied. Then, it follows that $(r_1, r_2) \in \mathcal{R}^{\text{ind}}_{\text{stat}}$ implies $(r_1, r_2) \in \mathcal{R}^{\text{ind}}_{\text{inst}}$. ■

Also, the results of this proposition are quite intuitive. When the TXs only have statistical CSI, they will spread their power in many directions in order to get some good channel. For the scenario of instantaneous CSI, the TXs know the good directions and transmit along them.

VI. CONCLUSIONS

We defined four outage rate regions for the MISO IC. The different definitions correspond to different scenarios of channel knowledge and outage specification. Comparing the definitions, we saw that regions for individual outage are larger than those for common. Also, we proved that the regions become larger when the TXs have instantaneous CSI instead of statistical CSI.

APPENDIX A

DERIVATION OF THE INDIVIDUAL USAGE PROBABILITY FOR STATISTICAL CSI

In order to find a closed form expression of the usage probability (20), we have to find the pdfs of a random variable of the form $X \triangleq \boldsymbol{h}^H \boldsymbol{\Psi} \boldsymbol{h}$, where $\boldsymbol{h} \sim \mathcal{CN}(\boldsymbol{0}, \boldsymbol{Q})$. We let $\boldsymbol{T}\boldsymbol{\Delta}\boldsymbol{T}^H$, where $\boldsymbol{\Delta} = \mathrm{diag}\{\lambda_1, \ldots, \lambda_n\}$, be the eigenvalue decomposition of $\boldsymbol{Q}^{1/2}\boldsymbol{\Psi}\boldsymbol{Q}^{1/2}$. Also, we define $\tilde{\boldsymbol{h}}, \bar{\boldsymbol{h}} \sim \mathcal{CN}(\boldsymbol{0}, \boldsymbol{I})$. Then, we get

$$X = \boldsymbol{h}^H \boldsymbol{\Psi} \boldsymbol{h} = \tilde{\boldsymbol{h}}^H \boldsymbol{Q}^{1/2} \boldsymbol{\Psi} \boldsymbol{Q}^{1/2} \tilde{\boldsymbol{h}} = \tilde{\boldsymbol{h}}^H \boldsymbol{T}\boldsymbol{\Delta}\boldsymbol{T}^H \tilde{\boldsymbol{h}} = \bar{\boldsymbol{h}}^H \boldsymbol{\Delta} \bar{\boldsymbol{h}}. \tag{52}$$

We define $\bar{h}_k$ to be the kth element of $\bar{\boldsymbol{h}}$. Now we can write (52) as

$$X = \boldsymbol{h}^H \boldsymbol{\Psi} \boldsymbol{h} = \sum_{k=1}^{K} \lambda_k |\bar{h}_k|^2, \tag{53}$$

where $K = \mathrm{rank}\left\{\boldsymbol{Q}^{1/2}\boldsymbol{\Psi}\boldsymbol{Q}^{1/2}\right\} \leq n$. Also $|\bar{h}_k|^2 \sim \exp(1)$, that is $|\bar{h}_k|^2$ is exponentially distributed with parameter 1. Note that all $|\bar{h}_k|^2$ are statistically independent. Without loss of generality we can assume that $\lambda_1 \geq \lambda_2 \geq \ldots \geq \lambda_n$. We define $\rho(\boldsymbol{\Delta})$ to be the number of distinct eigenvalues of $\boldsymbol{\Delta}$, $\lambda_{\langle 1 \rangle} > \lambda_{\langle 2 \rangle} > \ldots > \lambda_{\langle \rho(\boldsymbol{\Delta}) \rangle}$. Also, we define $\tau_k(\boldsymbol{\Delta})$ to be the multiplicity of $\lambda_{\langle k \rangle}$. Then, $\boldsymbol{h}^H \boldsymbol{\Psi} \boldsymbol{h}$ is hypoexponentially distributed with pdf [18, Ch. 5], [19]

$$f(x) = \sum_{k=1}^{\rho(\boldsymbol{\Delta})} \sum_{l=1}^{\tau_k(\boldsymbol{\Delta})} \chi_{kl}(\boldsymbol{\Delta}) \frac{\lambda_{\langle k \rangle}^{-l}}{(l-1)!} x^{l-l} e^{-x/\lambda_{\langle k \rangle}}, \;\; x \geq 0. \tag{54}$$

For the general case of non-distinct eigenvalues, the derivation of the coefficients $\chi_{kl}(\boldsymbol{\Delta})$ in (54) can be found in [20]. Assuming that $\tau_k(\boldsymbol{\Delta}) = 1, \;\forall k$, i.e. all eigenvalues of $\boldsymbol{Q}^{1/2}\boldsymbol{\Psi}\boldsymbol{Q}^{1/2}$ are distinct, we can write (54) as

$$f(x) = \sum_{k=1}^{K} \frac{\chi_{k1}(\boldsymbol{\Delta})}{\lambda_k} e^{-x/\lambda_k}, \;\; x \geq 0 \tag{55}$$

with

$$\chi_{k1}(\boldsymbol{\Delta}) = \prod_{n=1,n\neq k}^{K} \frac{\lambda_k}{\lambda_k - \lambda_n}. \tag{56}$$

Now, we define $f_{ii}(x)$ and $f_{ji}(x)$ to be the pdf of $\boldsymbol{h}_{ii}^H \boldsymbol{\Psi}_i \boldsymbol{h}_{ii}$ and $\boldsymbol{h}_{ji}^H \boldsymbol{\Psi}_j \boldsymbol{h}_{ji}$, respectively. Combining (20) and (53), we have

$$\Pr\left\{\boldsymbol{h}_{ii}^H \boldsymbol{\Psi}_i \boldsymbol{h}_{ii} - \gamma_i \boldsymbol{h}_{ji}^H \boldsymbol{\Psi}_j \boldsymbol{h}_{ji} > \gamma_i \sigma_i^2\right\} = \Pr\left\{X_{ii} - \gamma_i X_{ji} > \gamma_i \sigma_i^2\right\} = \Pr\left\{X_{ii} + \tilde{X}_{ji} > \gamma_i \sigma_i^2\right\}, \tag{57}$$

where $\tilde{X}_{ji} \triangleq -\gamma_i X_{ji}$. We note that the pdf of $\tilde{X}_{ji}$ is $f_{ji}(-x/\gamma_i)/\gamma_i$. To get the pdf $f_i(x)$ of $X_{ii} + \tilde{X}_{ji}$, we convolve $f_{ii}(x)$ and $f_{ji}(-x/\gamma_i)/\gamma_i$. Then we get (57) by computing

$$U_i^{\text{stat}}(\boldsymbol{\Psi}_i, \boldsymbol{\Psi}_j, r_i) = \int_{\gamma_i \sigma_i^2}^{\infty} \int_{-\infty}^{\infty} \frac{1}{\gamma_i} f_{ji}(-y/\gamma_i) f_{ii}(x-y)\, dy\, dx. \tag{58}$$

REFERENCES

[1] J. Lindblom, E. Karipidis, and E. G. Larsson, "Outage rate regions for the MISO IFC," in *Proc. IEEE Asilomar Conf. Signals, Systems, and Computers*, Pacific Grove, CA, Nov. 2009, pp. 1120–1124.

[2] D. Tse and P. Viswanath, *Fundamentals of Wireless Communications*, Cambridge University Press, 2005.

[3] E. A. Jorswieck, E. G. Larsson, and D. Danev, "Complete characterization of the Pareto boundary for the MISO interference channel," *IEEE Trans. Signal Process.*, vol. 56, pp. 5292–5296, Oct. 2008.

[4] J. Lindblom, E. G. Larsson, and E. A. Jorswieck, "Parametrization of the MISO IFC rate region: The case of partial channel state information," *IEEE Trans. Wireless Commun.*, vol. 9, pp. 500–504, Feb. 2010.

[5] E. A. Jorswieck and H. Boche, "Outage probability in multiple antenna systems," *European Trans. on Telecommun.*, vol. 18, pp. 217–233, Apr. 2007.

[6] L. Li, N. Jindal, and A. J. Goldsmith, "Outage capacities and optimal power allocation for fading multiple-access channels," *IEEE Trans. Inf. Theory*, vol. 51, pp. 1326–1347, Apr. 2005.

[7] L. Li and A. J. Goldsmith, "Capacity and optimal resource allocation for fading broadcast channels–Part II: Outage capacity," *IEEE Trans. Inf. Theory*, vol. 47, pp. 1103–1127, Mar. 2001.

[8] V. Ntranos, N. D. Sidiropoulos, and L. Tassiulas, "On multicast beamforming for minimum outage," *IEEE Trans. Wireless Commun.*, vol. 8, no. 6, pp. 3172–3181, June 2009.

[9] R. Narasimhan, "Individual outage rate regions for fading multiple access channels," in *Proc. IEEE Int. Symp. on Inf. Theory (ISIT)*, Nice, France, June 2007, pp. 1571–1575.

[10] X. Kang, Y.-C. Liang, and H. K. Garg, "Fading cognitive multiple access channels: Outage capacity regions and optimal power allocation," *IEEE Trans. Wireless Commun.*, vol. 9, pp. 2382–2391, July 2010.

[11] S. Kandukuri and S. Boyd, "Optimal power control in interference-limited fading wireless channels with outage-probability specifications," *IEEE Trans. Wireless Commun.*, vol. 1, pp. 46–55, Jan. 2002.

[12] X. Lei, L. Cottatellucci, and K. Avrachenkov, "Equilibriums in slow fading interfering channels with partial knowledge of the channels," in *Proc. IEEE INFOCOM*, Shanghai, China, Apr. 2011, accepted.

[13] Y. Weng and D. Tuninetti, “Outage analysis of block-fading gaussian interference channels: General case,” in *Proc. IEEE Int. Conf. on Commun. (ICC)*, Cape Town, South Africa, May 2010, pp. 1–5.

[14] W.-C. Li, T.-H. Chang, and C.-Y. Chi, “A convex approximation approach to weighted sum rate maximization of multiuser MISO interference channel under outage constraints,” in *Proc. IEEE Int. Conf. on Acoustics, Speech, and Signal Process. (ICASSP)*, Prague, Czech Republic, May 2011, pp. 3368–3371.

[15] X. Shang, B. Chen, and H. V. Poor, “On the optimality of beamforming for multi-user MISO interference channels with single-user detection,” in *Proc. IEEE Global Telecommun. Conf. (GLOBECOM)*, Honolulu, HI, USA, Nov. 2009, pp. 1–5.

[16] A. Goldsmith, S. A. Jafar, N. Jindal, and S. Vishwanath, “Capacity limits of MIMO channels,” *IEEE J. Sel. Areas Commun.*, vol. 21, no. 5, pp. 684–702, 2003.

[17] J. Lindblom, E. Karipidis, and E. G. Larsson, “Closed-form parameterization of the Pareto boundary for the two-user MISO interference channel,” in *Proc. IEEE Int. Conf. on Acoustics, Speech, and Signal Process. (ICASSP)*, Prague, Czech Republic, May 2011, pp. 3372–3375.

[18] S. M. Ross, *Introduction to Probability Models*, Academic Press, 2003.

[19] A. Bletsas, H. Shin, and M. Z. Win, “Cooperative communications with outage-optimal opportunistic relaying,” *IEEE Trans. Wireless Commun.*, vol. 6, pp. 3450–3460, Sept. 2007.

[20] H. Shin and M. Z. Win, “MIMO diversity in the presence of double scattering,” *IEEE Trans. Inf. Theory*, vol. 54, pp. 2976–2996, July 2008.

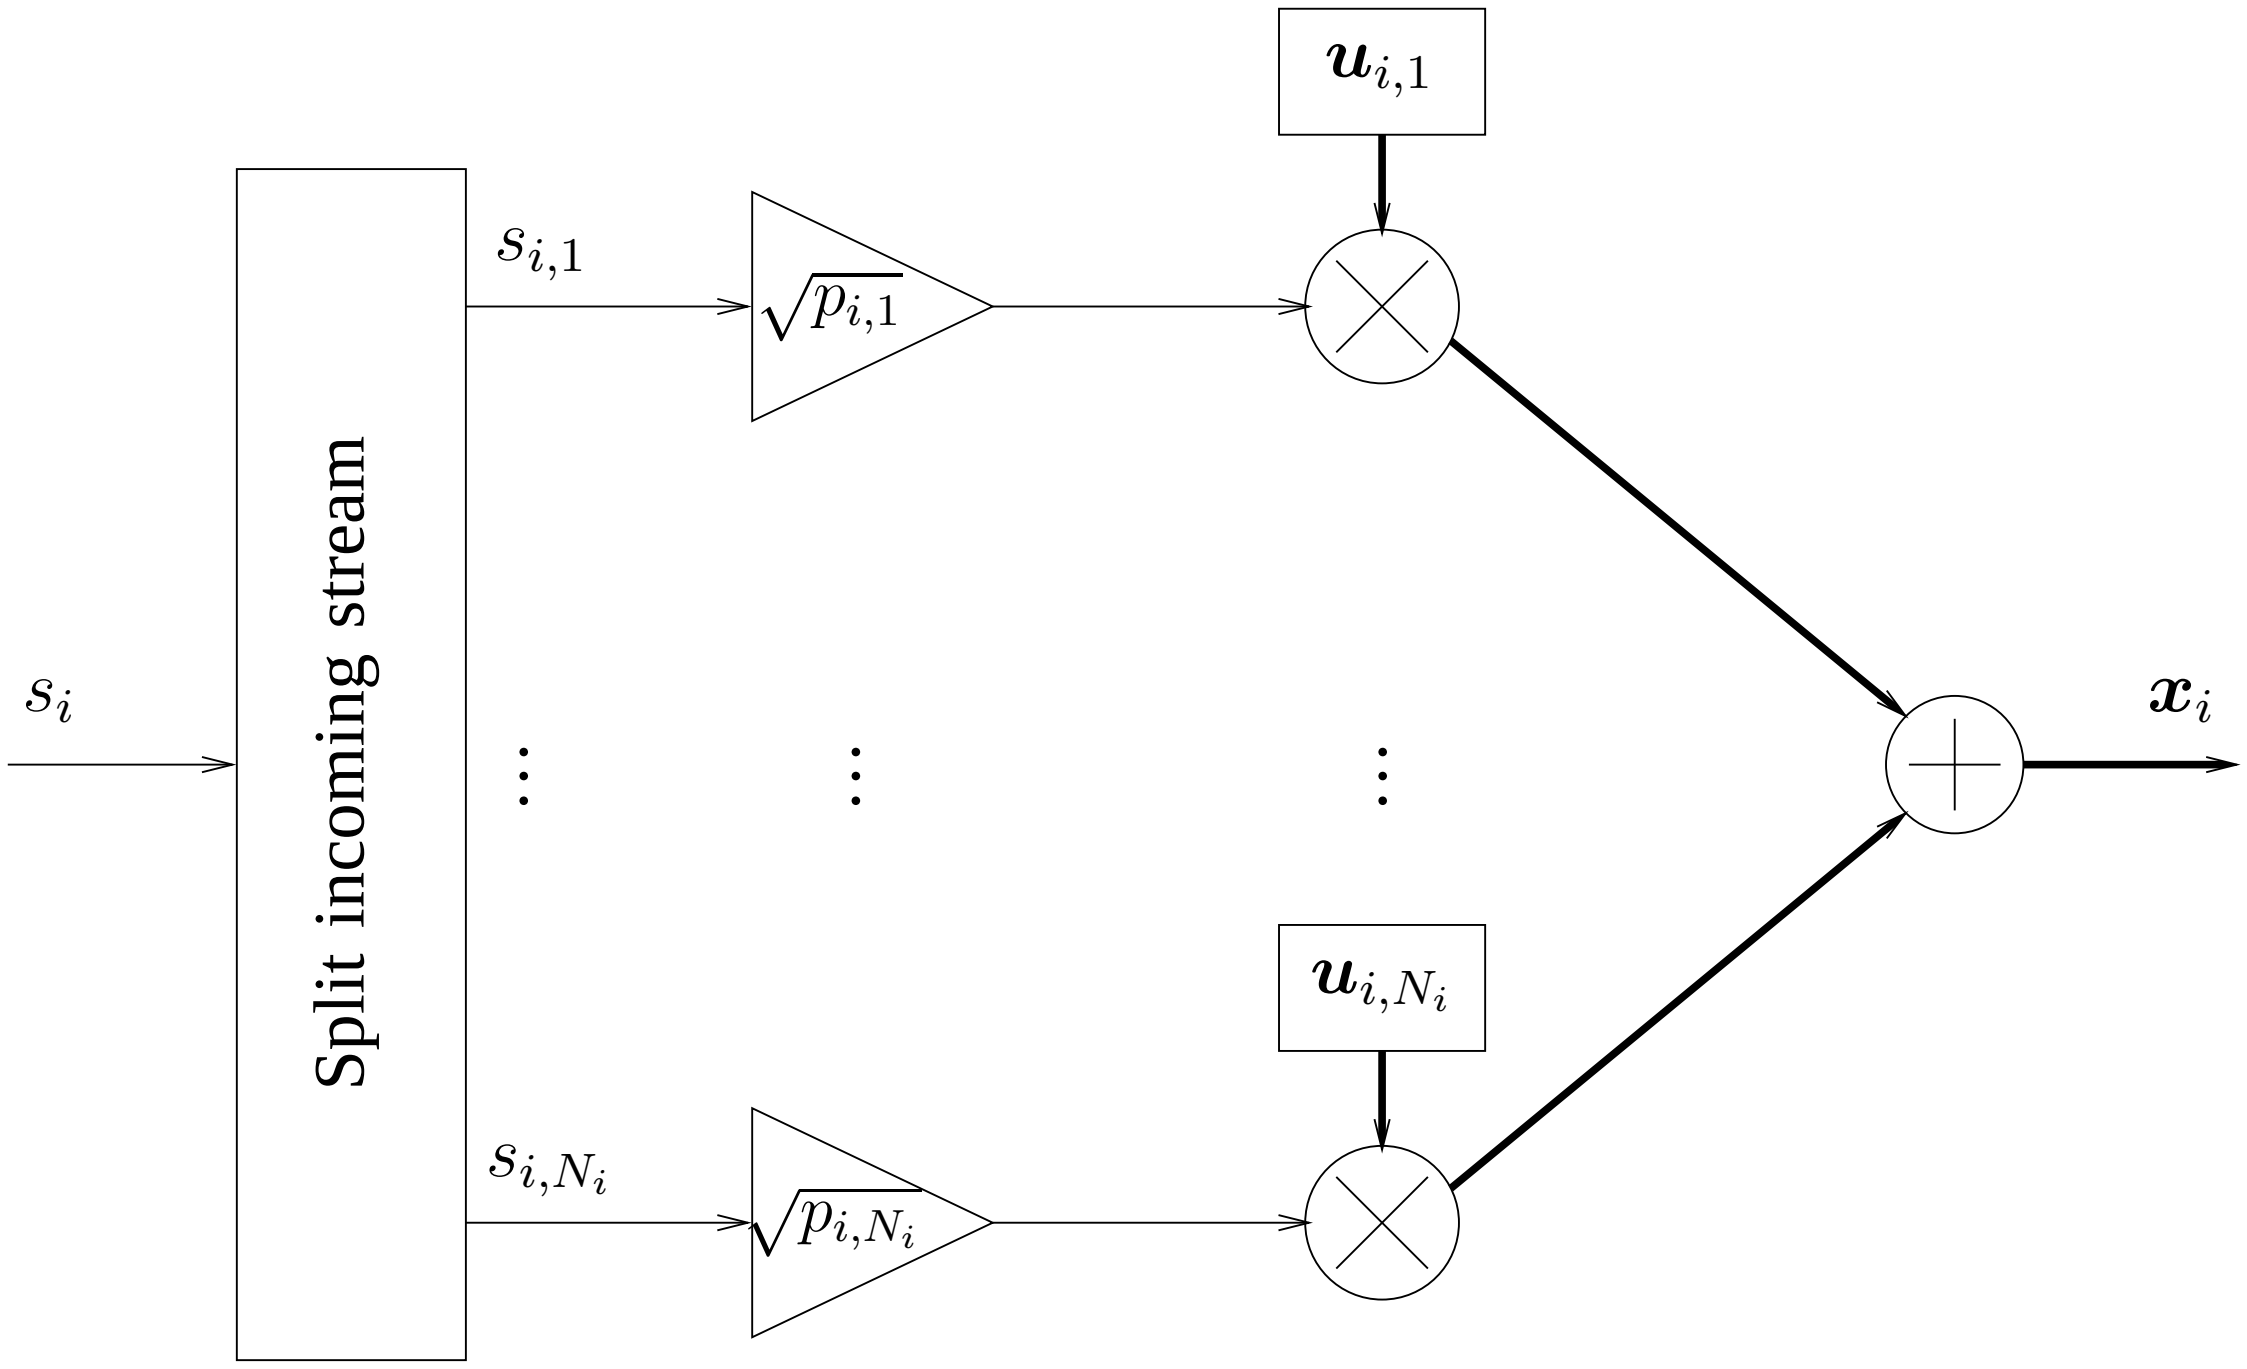

Fig. 1. Implementation of the multi-stream transmission.

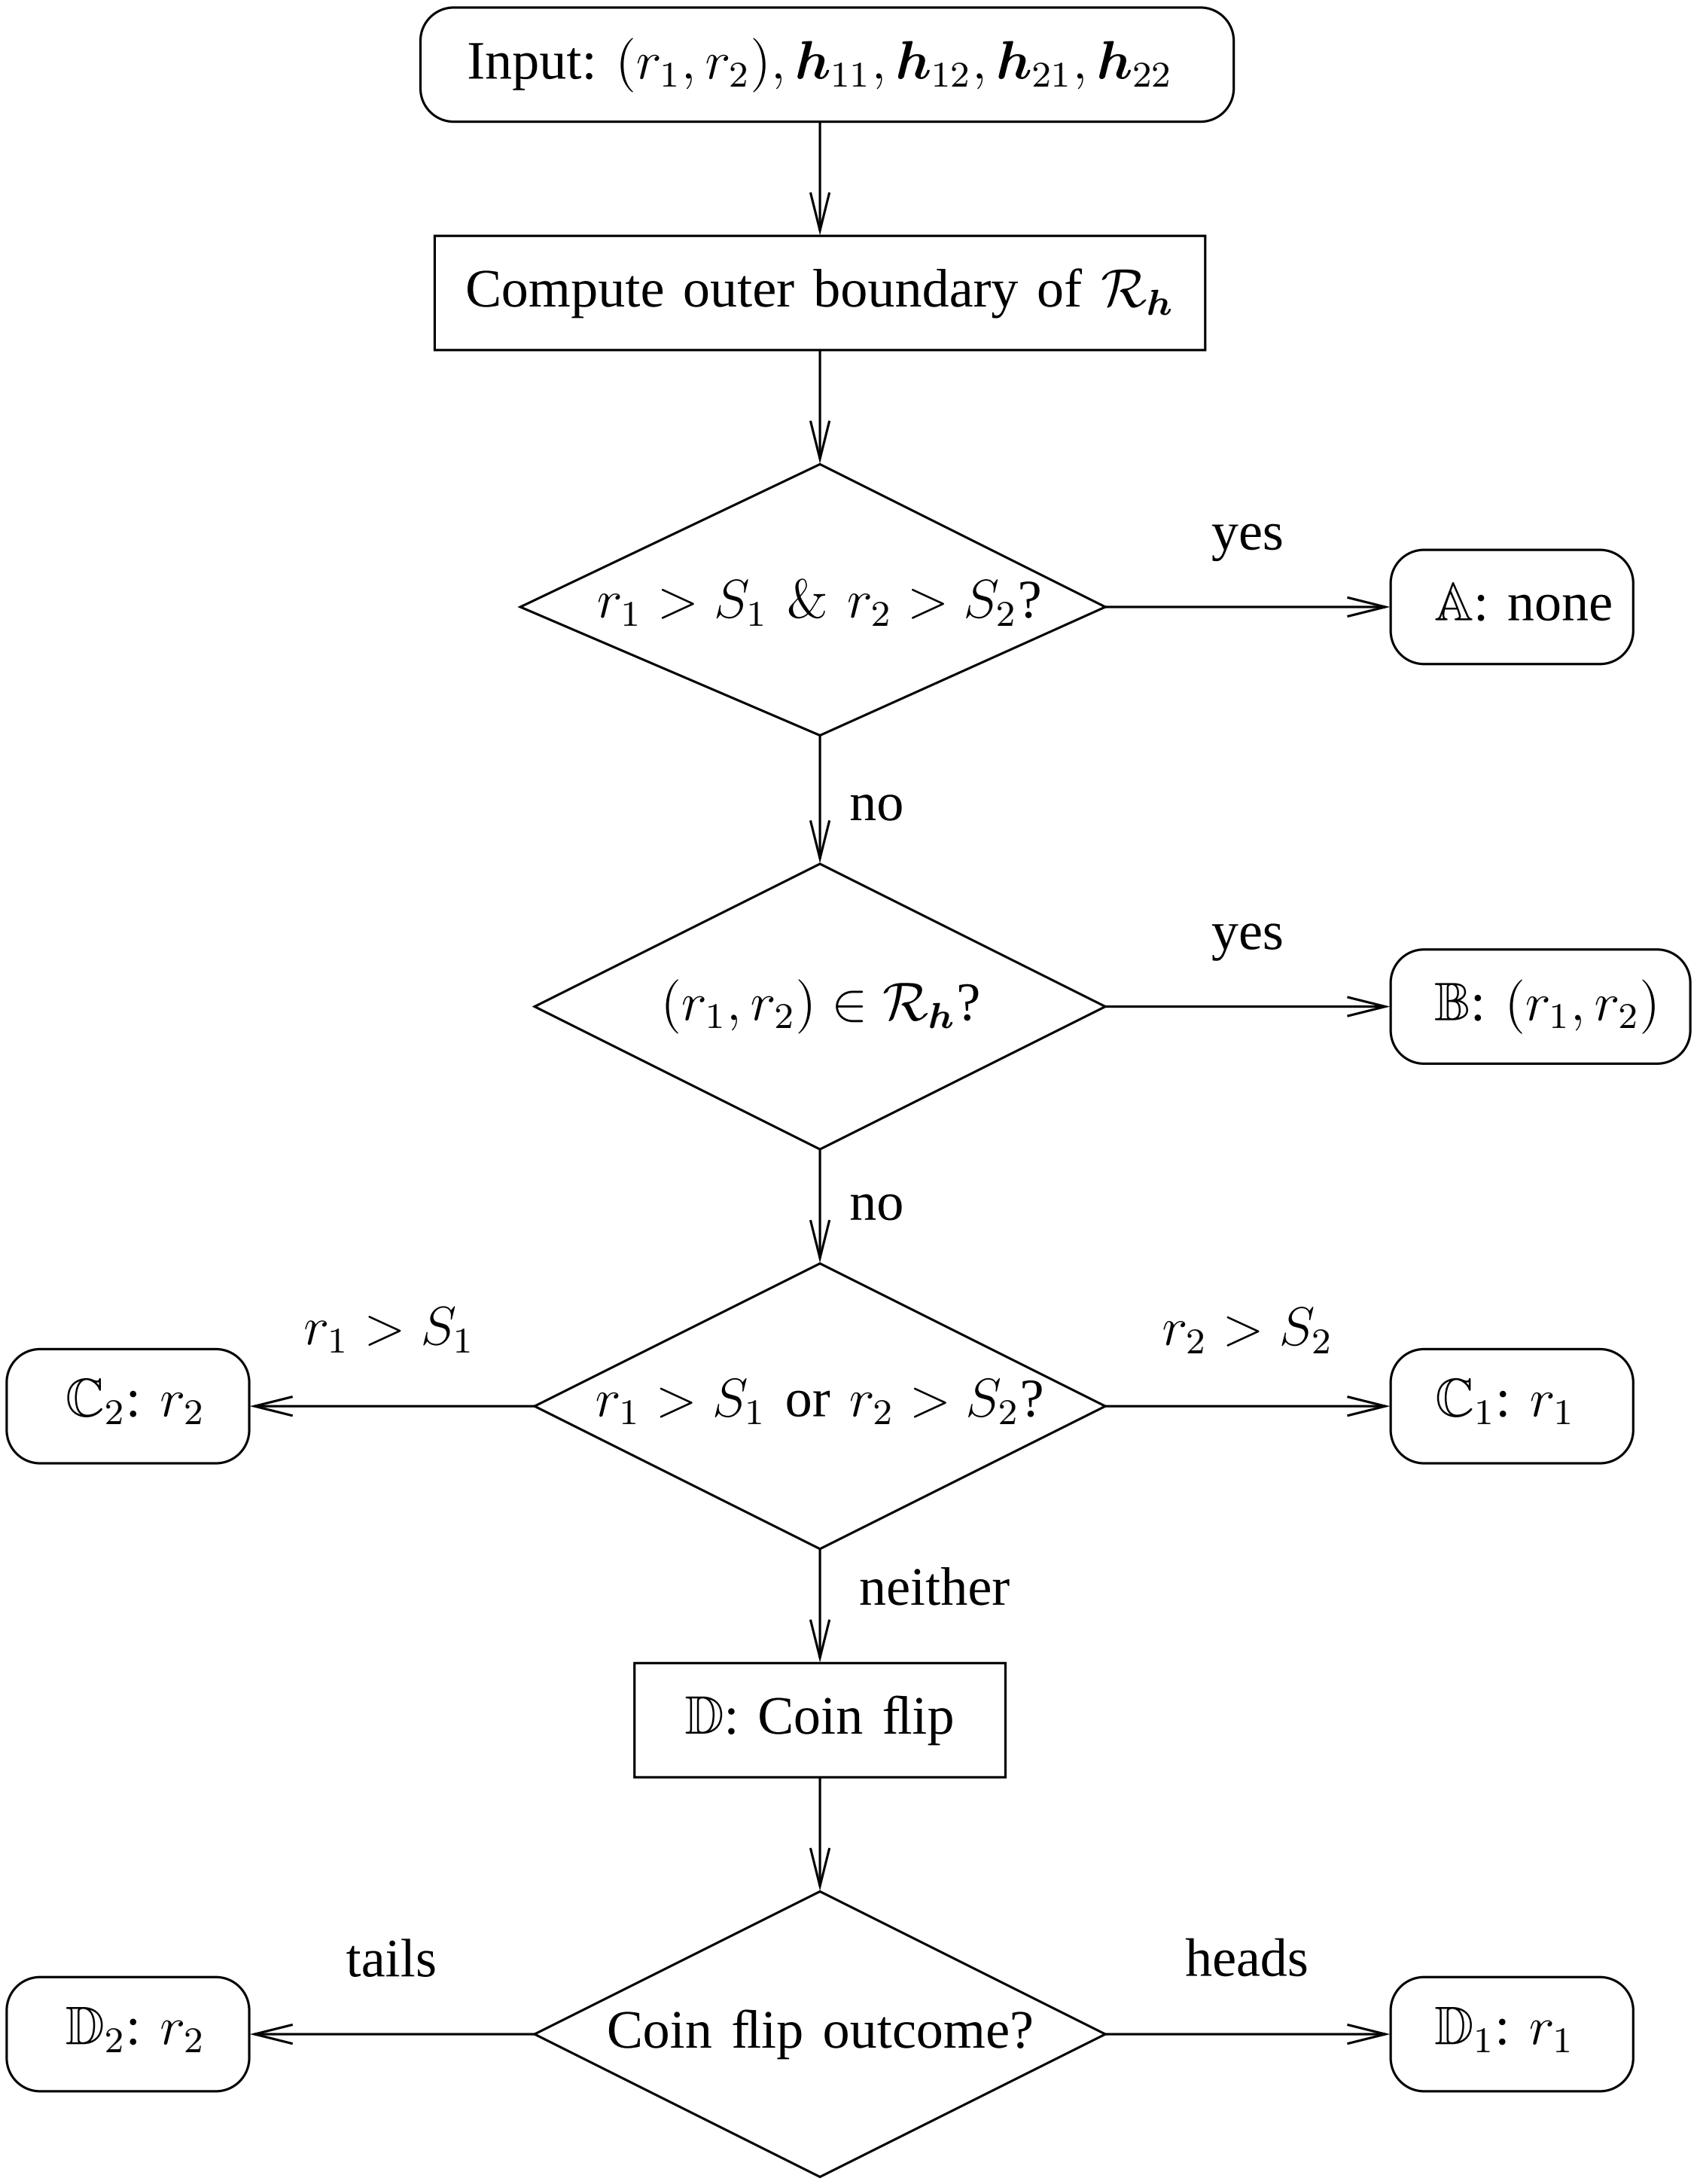
Input: $(r_1, r_2), \boldsymbol{h}_{11}, \boldsymbol{h}_{12}, \boldsymbol{h}_{21}, \boldsymbol{h}_{22}$
Compute outer boundary of $\mathcal{R}_{\boldsymbol{h}}$
$r_1 > S_1$ & $r_2 > S_2$?
yes
$\mathbb{A}$: none
no
$(r_1, r_2) \in \mathcal{R}_{\boldsymbol{h}}$?
yes
$\mathbb{B}$: (r_1, r_2)
no
$r_1 > S_1$
$r_2 > S_2$
$\mathbb{C}_2$: r_2
$r_1 > S_1$ or $r_2 > S_2$?
$\mathbb{C}_1$: r_1
neither
$\mathbb{D}$: Coin flip
tails
heads
$\mathbb{D}_2$: r_2
Coin flip outcome?
$\mathbb{D}_1$: r_1

Fig. 2. Flowchart determining achievability of rates r_1 and r_2 for given channel realizations and coin bias.

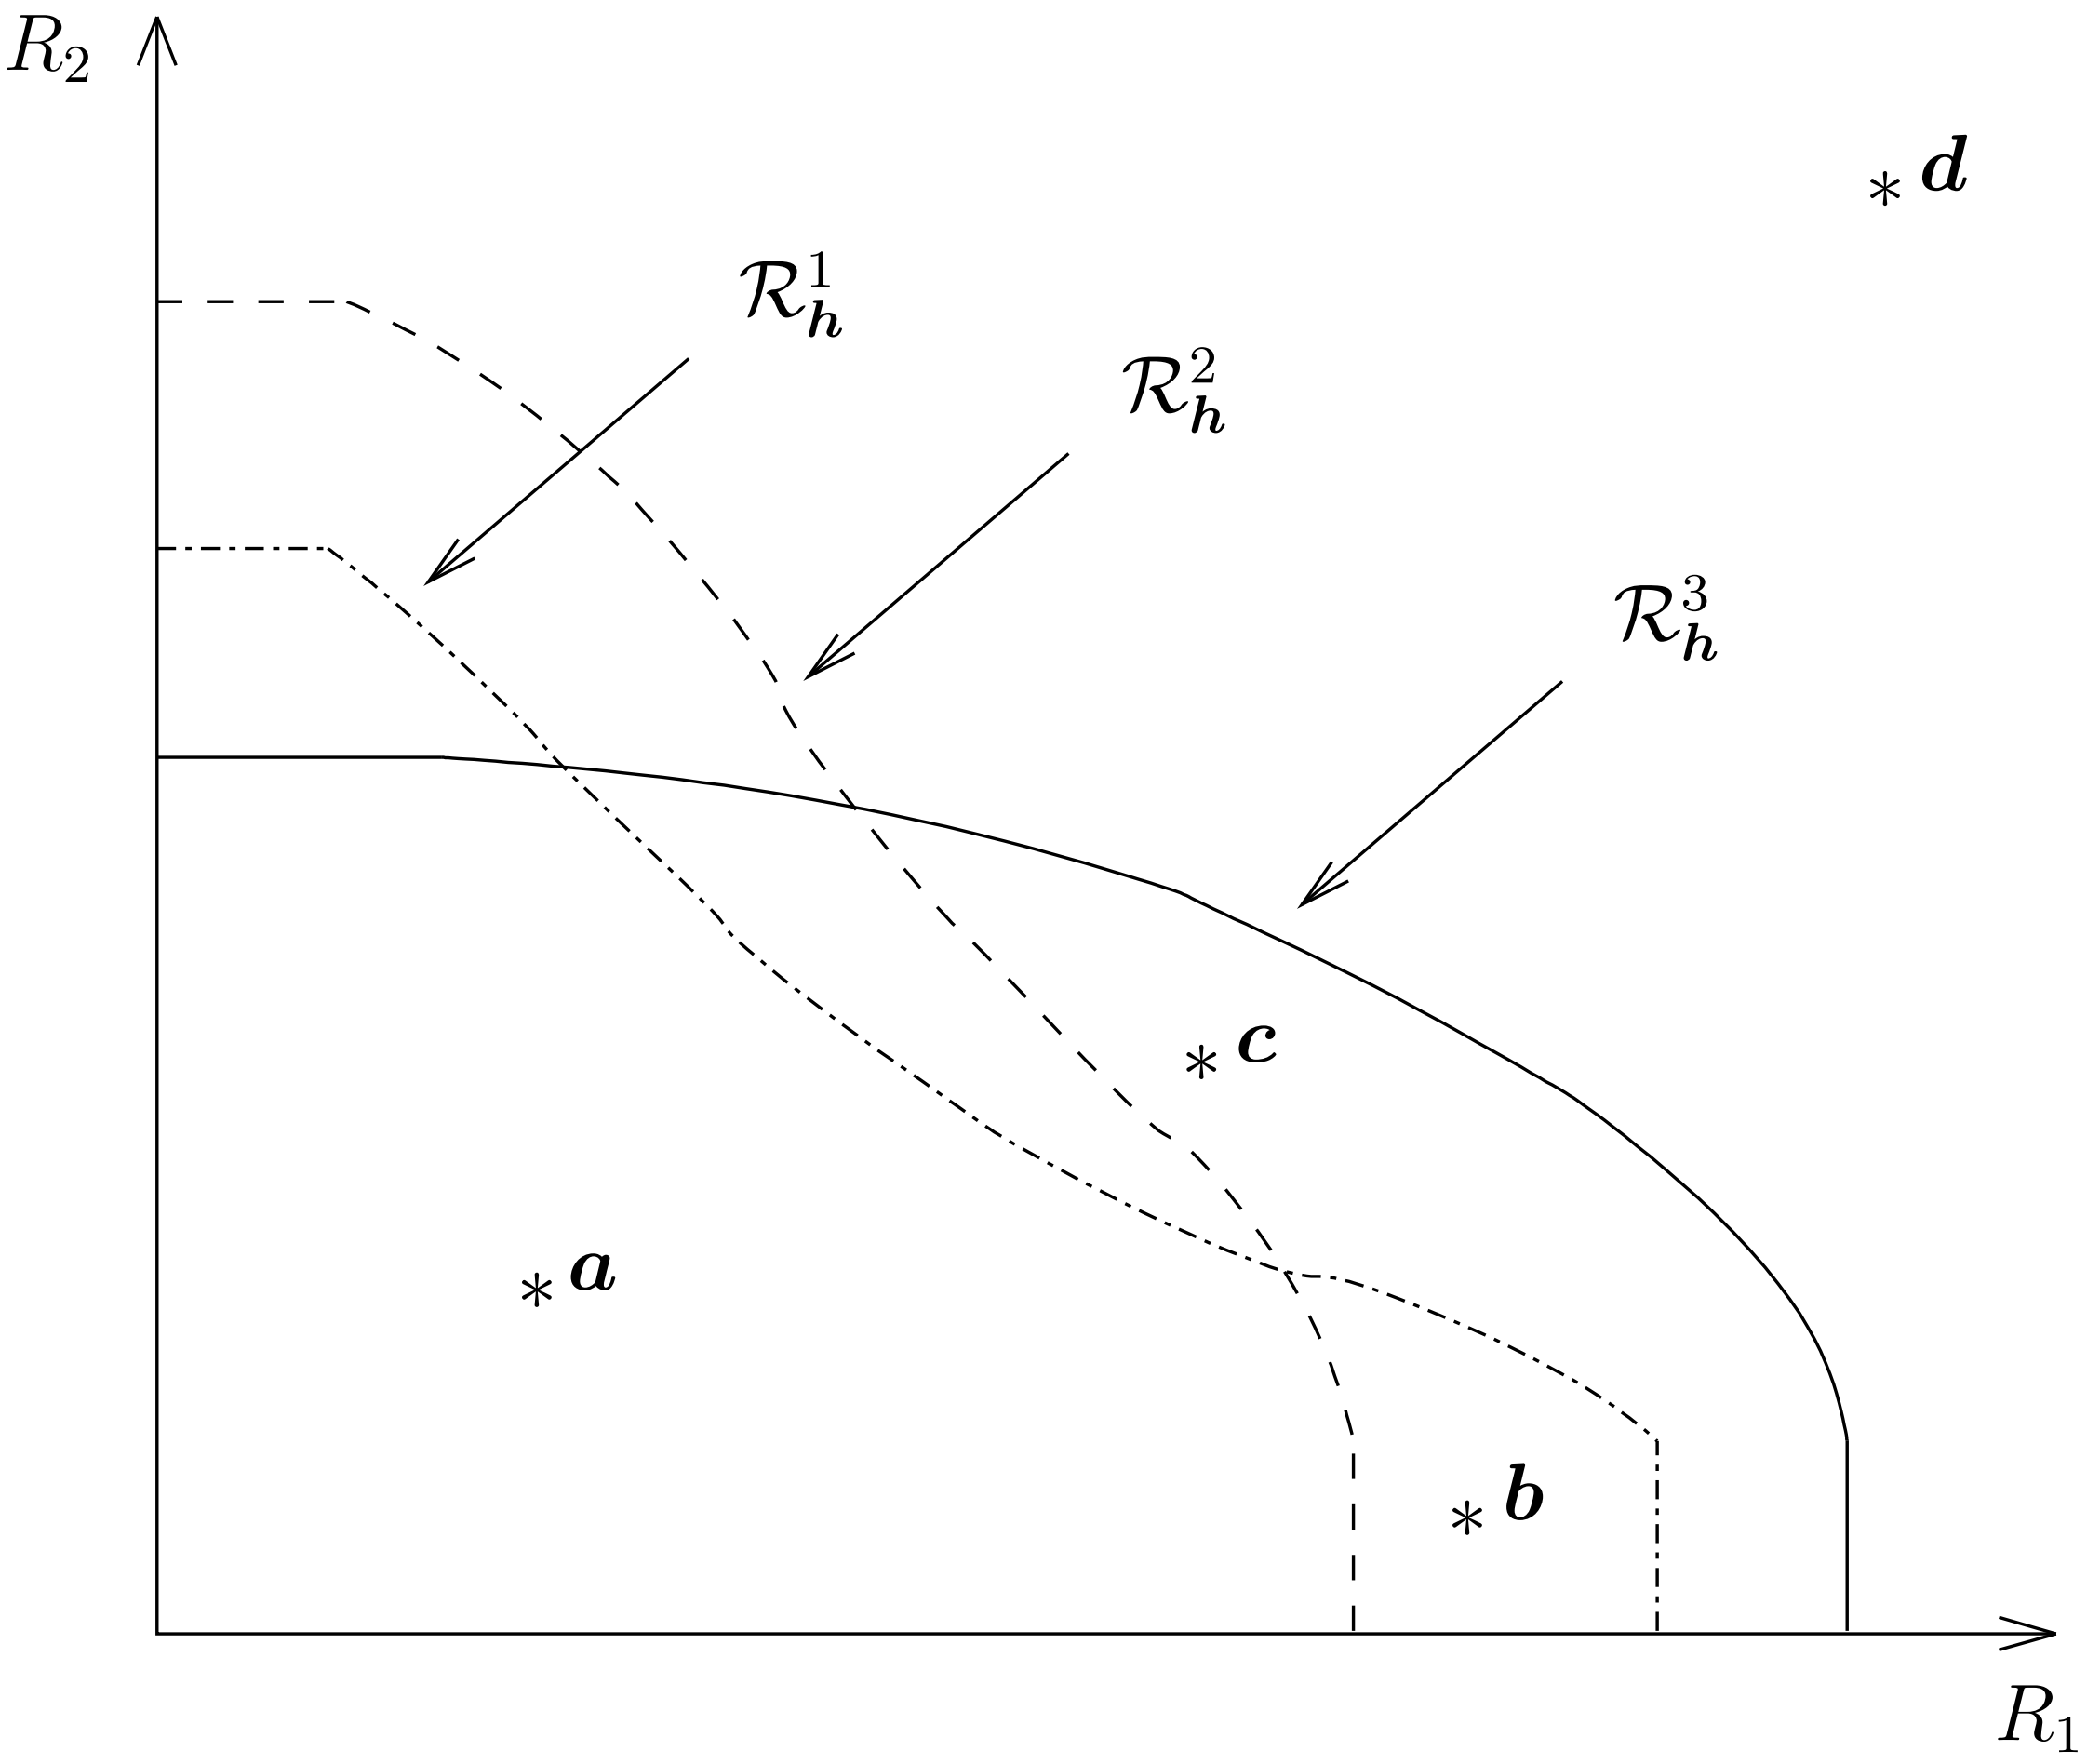
R_2
$* \boldsymbol{d}$
$\mathcal{R}_{\boldsymbol{h}}^1$
$\mathcal{R}_{\boldsymbol{h}}^2$
$\mathcal{R}_{\boldsymbol{h}}^3$
$* \boldsymbol{c}$
$* \boldsymbol{a}$
$* \boldsymbol{b}$
R_1

Fig. 3. Three examples of instantaneous rate regions and rate points.

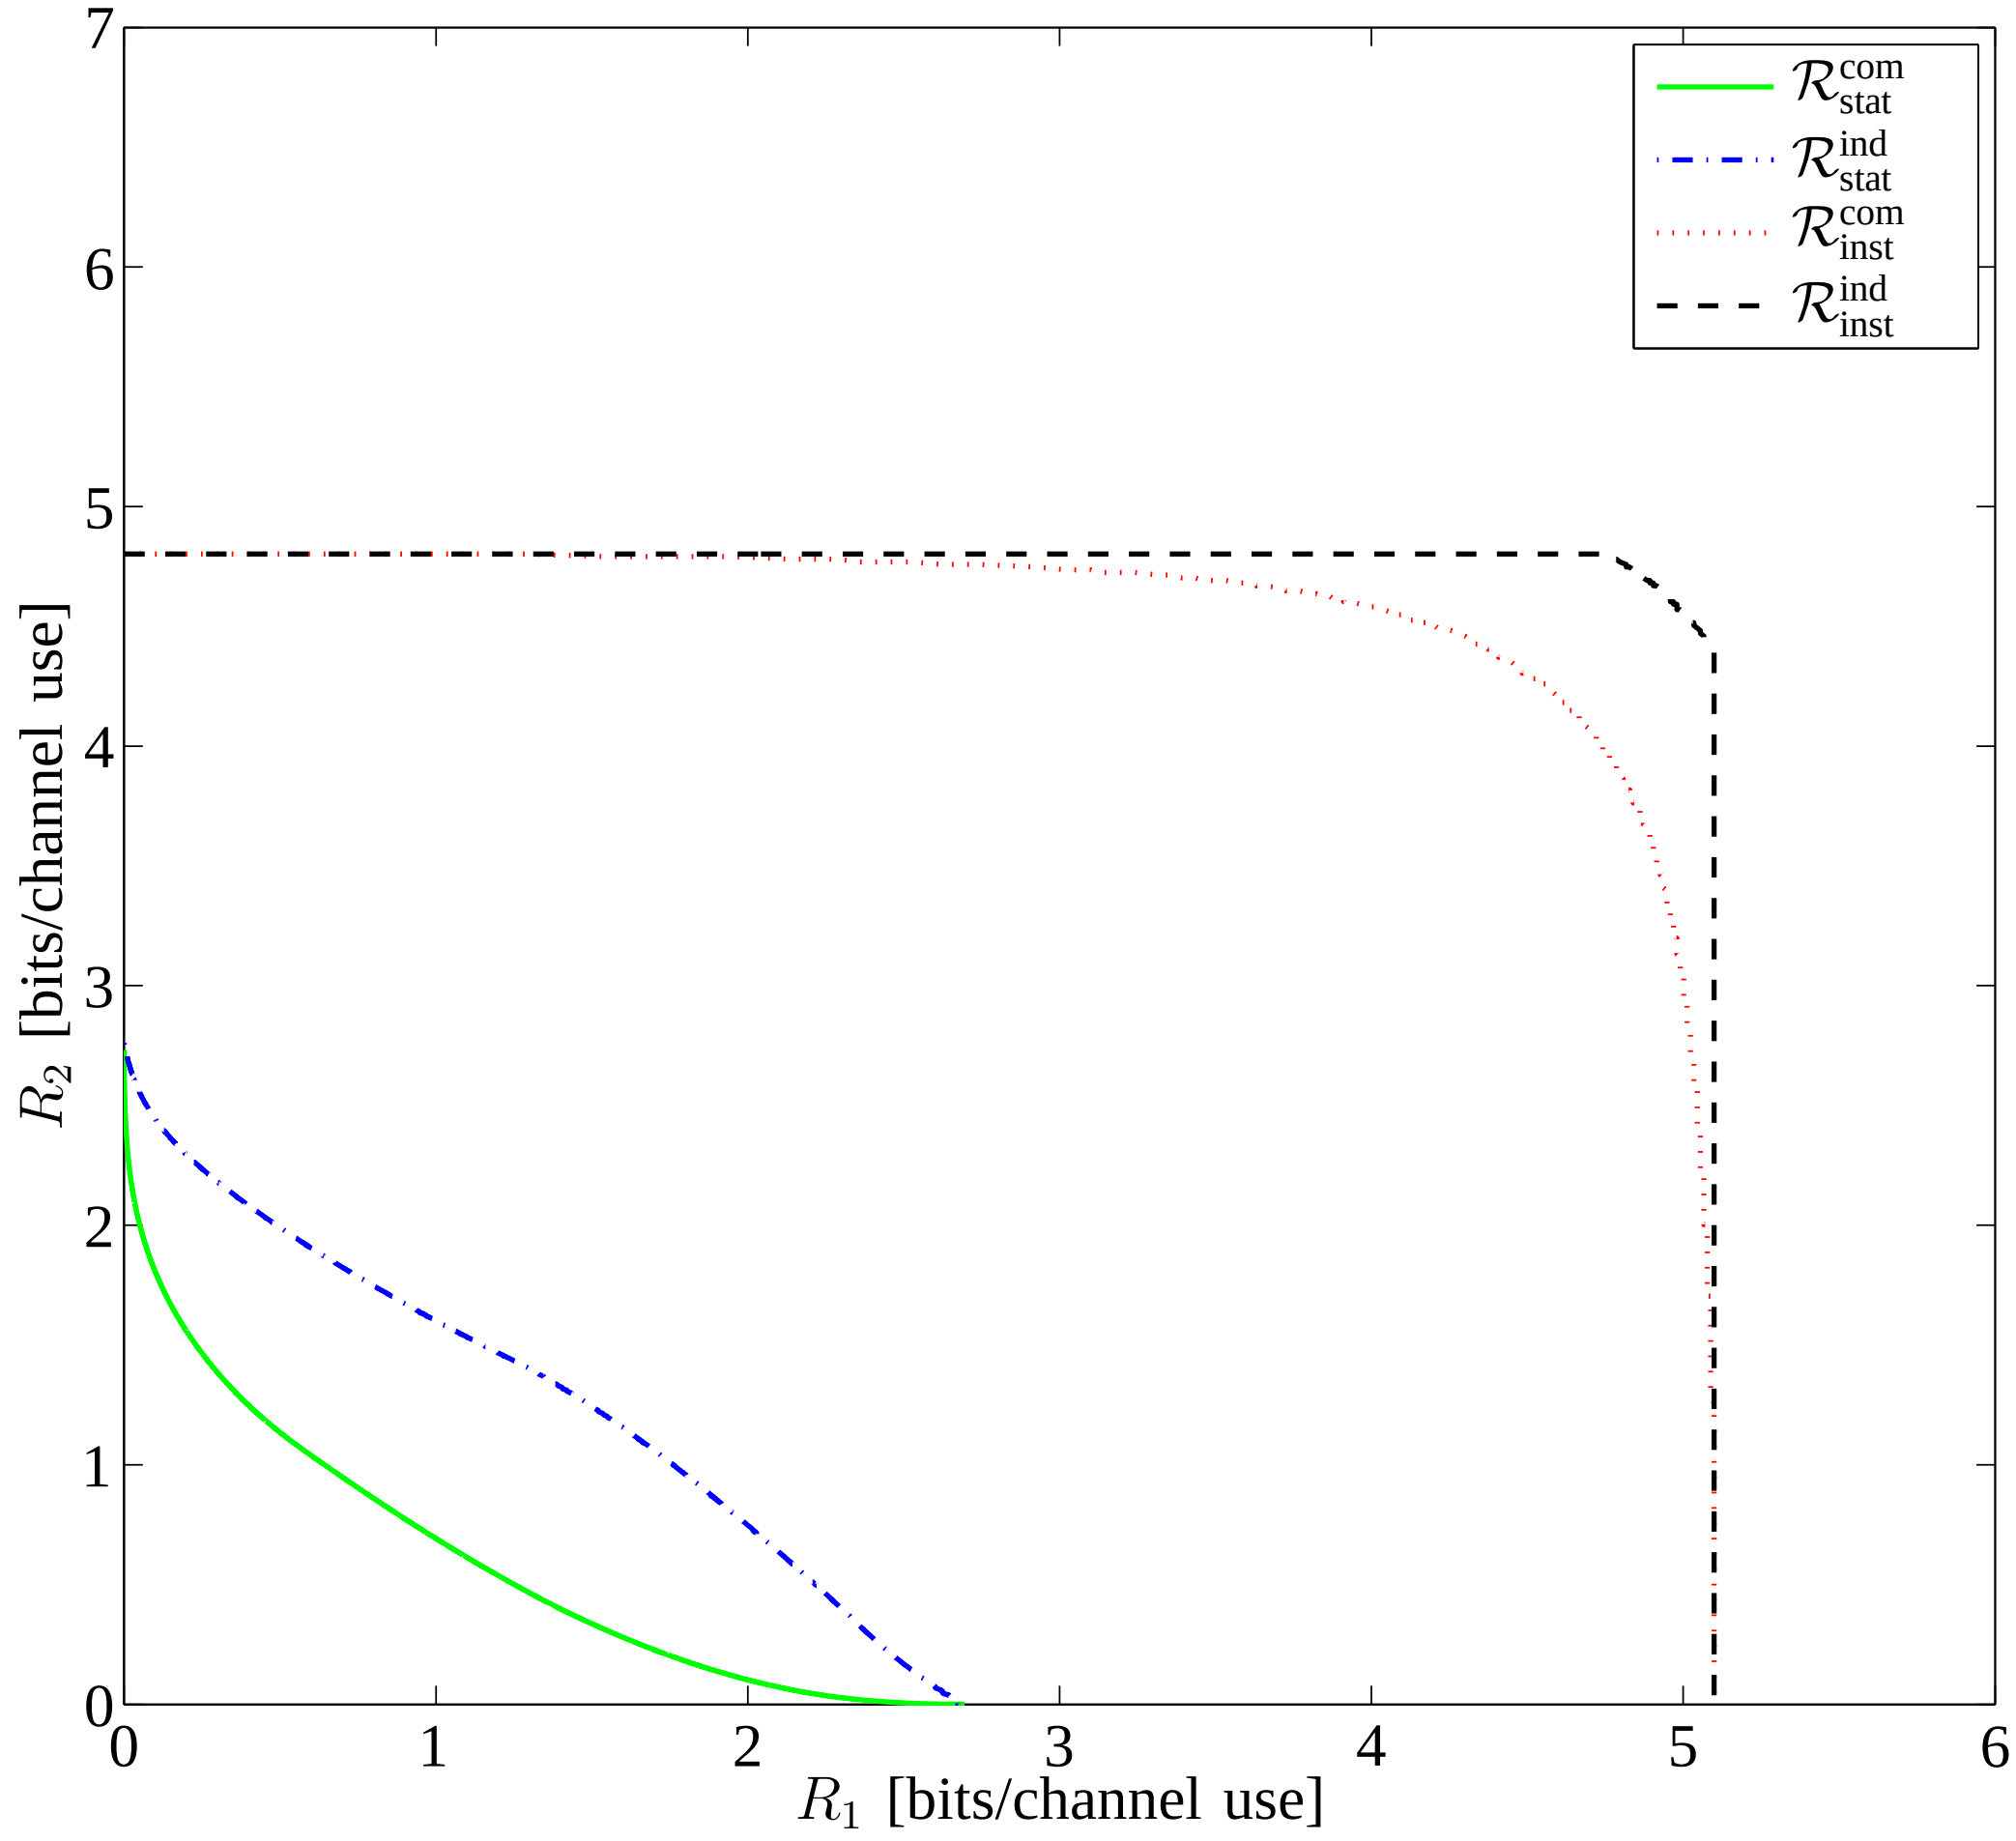

Fig. 4. Outer boundaries of the outage rate region for the MISO IC.

TABLE I
EXAMPLE OF APPROXIMATING USAGE PROBABILITIES FOR THREE REALIZATIONS.

	$\mathcal{R}_{\boldsymbol{h}}^1$	$\mathcal{R}_{\boldsymbol{h}}^2$	$\mathcal{R}_{\boldsymbol{h}}^3$	$U_{\text{com}}^{\text{inst}}$	U_1^{inst}	U_2^{inst}
$\boldsymbol{a}$	$\mathbb{B}$	$\mathbb{B}$	$\mathbb{B}$	1	1	1
$\boldsymbol{b}$	$\mathbb{B}$	$\mathbb{C}_2$	$\mathbb{B}$	$2/3$	$2/3$	1
$\boldsymbol{c}$	$\mathbb{D}$	$\mathbb{D}$	$\mathbb{B}$	$1/3$	$(1+2t)/3$	$1-2t/3$
$\boldsymbol{d}$	$\mathbb{A}$	$\mathbb{A}$	$\mathbb{A}$	0	0	0